




AS-Interface DeviceNet gateway with PLC

ControllerE 1Master DN RS232

Article no longer available - archive entry

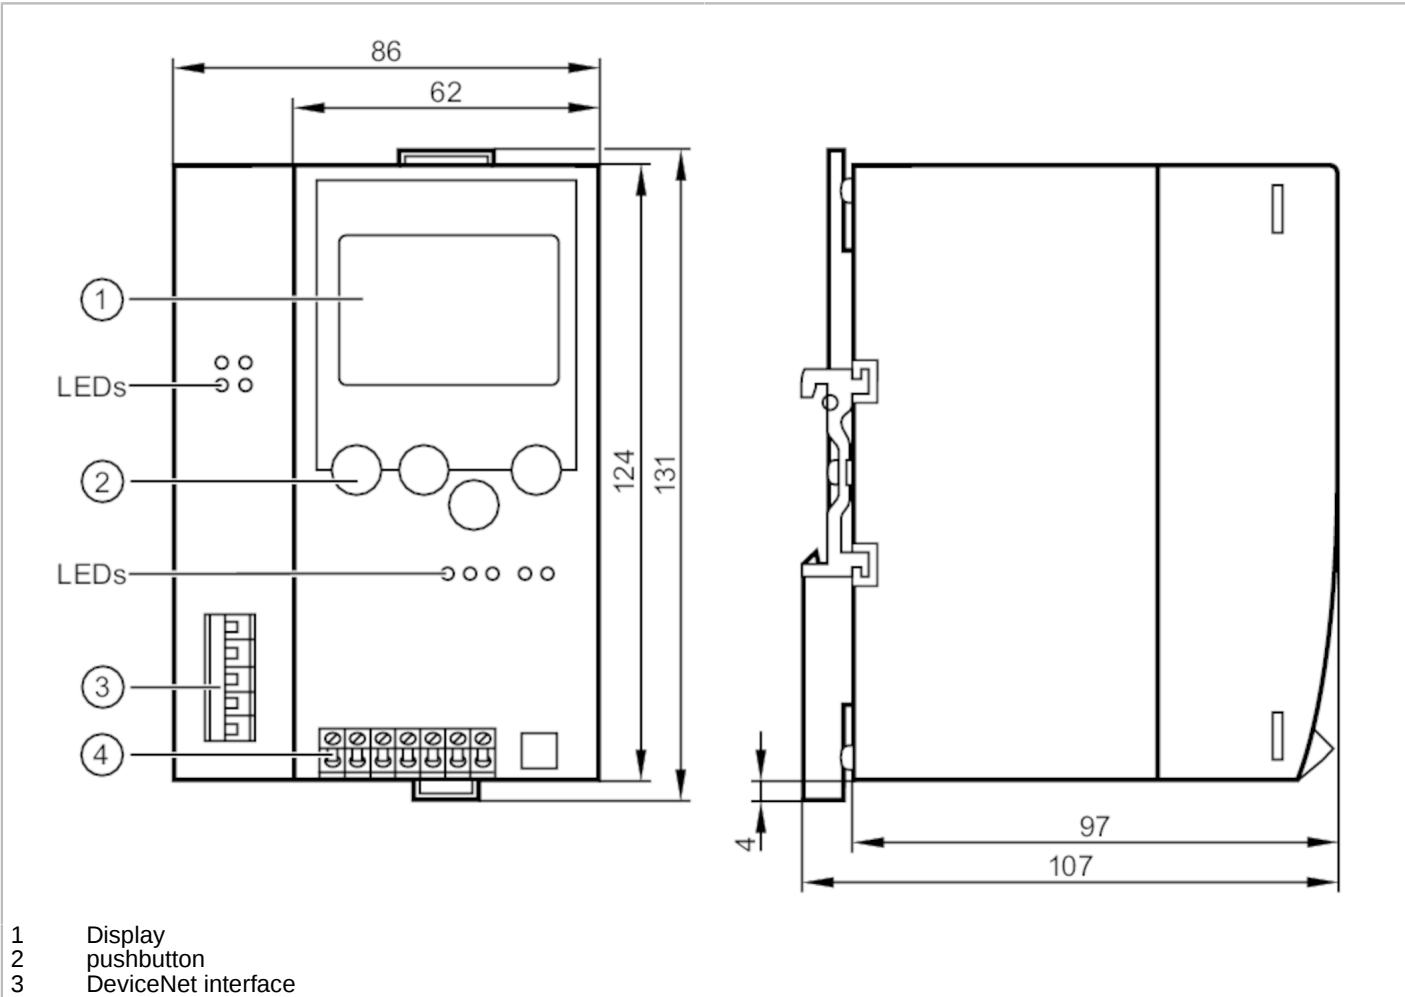

Application	
Application	decentralised controller; DeviceNet gateway
Electrical data	
Operating voltage	[V] 24 DC
Current consumption	[mA] 500
Max. current consumption from AS-i	[mA] 10
Max. power consumption	[VA] 10
Number of AS-i masters	1
Interfaces	
Communication interface	RS232; CAN
CAN	
Protocol	DeviceNet
Usage type	data transmission
Note on interfaces	Group 2 only Slave



AS-Interface DeviceNet gateway with PLC

ControllerE 1Master DN RS232

RS232	
Number of R232 interfaces	1
Transmission rate	9600...115200 Baud
Connector type	RJ11
Usage type	programming
Note on interfaces	electrically isolated

Operating conditions	
Ambient temperature [°C]	0...60
Storage temperature [°C]	-20...70
Max. relative air humidity [%]	95
Protection	IP 20

AS-i classification	
AS-i version	2.1
AS-i master profile	M3
AS-i certificate	61111

Mechanical data	
Housing	housing for DIN rail mounting
Materials	aluminium; steel sheet galvanised

Displays / operating elements		
Display	function	3 x LED, red
		4 x LED, green
		2 x LED, yellow
		full graphic LCD display

Remarks	
Pack quantity	1 pcs.

Electrical connection	
Connection	

