

# OGP500



## Retro-reflective sensor

OGP-FPKG/US100



1 programming buttons



### Product characteristics

Type of light	red light
Housing	threaded type

### Application

Special feature	polarisation filter
Function principle	Retro-reflective sensor
Application	Industrial applications / factory automation

### Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	20
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	624

### Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	150; (200 (...60 °C))
Switching frequency DC	[Hz]	2000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

### Detection zone

Range referred to prismatic reflector	[m]	0.03...5; (Prismatic reflector Ø 80 E20005)
Factory setting		dark-on mode
Range adjustable		yes
Max. light spot diameter	[mm]	200

# OGP500



## Retro-reflective sensor

OGP-FPKG/US100

Light spot dimensions refer to	at maximum range
Polarisation filter available	yes

### Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

### Tests / approvals

EMC	EN 60947-5-2	
MTTF	[years]	431

### Mechanical data

Weight	[g]	52.1
Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 72
Thread designation		M18 x 1
Materials		stainless steel (316L/1.4404); PA; LCP; EPDM; TPU
Lens material		front pane:PMMA

### Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

### Accessories

Items supplied	lock nuts: 2
----------------	--------------

### Remarks


Remarks	operating voltage "supply class 2" according to cULus
Pack quantity	1 pcs.

### Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4



### Connection

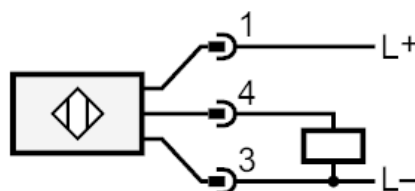

# OGP500



## Retro-reflective sensor

OGP-FPKG/US100

### Diagrams and graphs

excess gain graph

