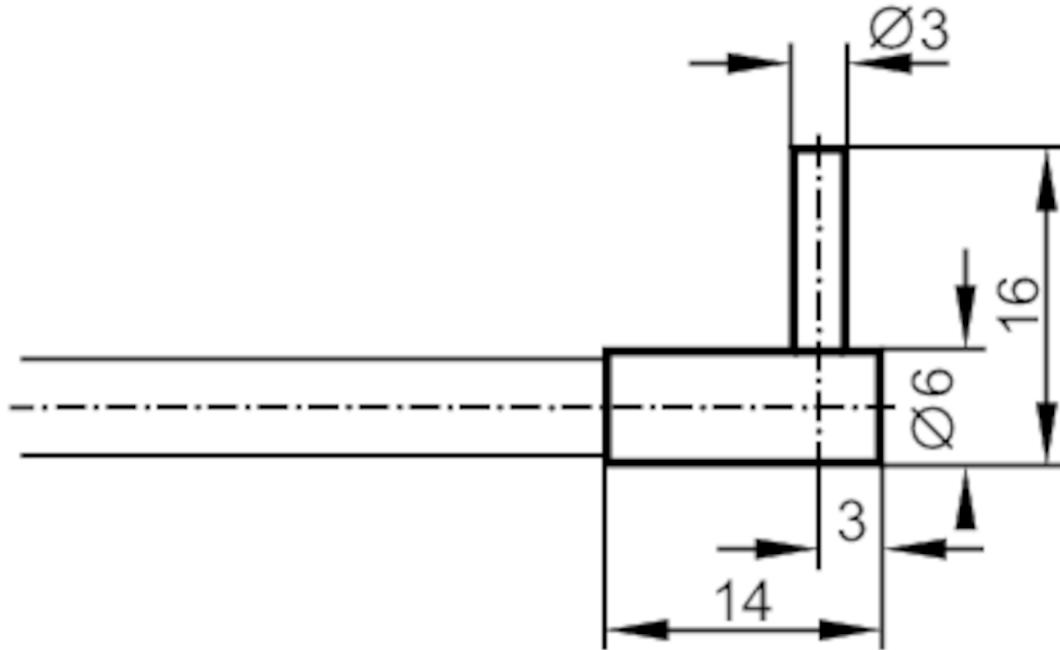


Fibre optic through-beam sensor

FE-00-M-V-R3/2m

Article no longer available - archive entry

**Application**

Function principle	Through-beam sensor
--------------------	---------------------

Detection zone

Range with fibre-optic amplifier type	OKF; OUF
---------------------------------------	----------

OKF

Range of fibre optics [mm]	96
----------------------------	----

OUF

Range of fibre optics [mm]	96
----------------------------	----

Operating conditions

Ambient temperature [°C]	-20...150
--------------------------	-----------

Mechanical data

Version of sensing head	angled
-------------------------	--------

Sensing head diameter [mm]	3
----------------------------	---

Sensing head length [mm]	10
--------------------------	----

Total length [mm]	2000
-------------------	------

Min. bending radius [mm]	20
--------------------------	----

Fibre material	glass
----------------	-------

Fibre head material	stainless steel (303/1.4305)
---------------------	------------------------------

E20541



Fibre optic through-beam sensor

FE-00-M-V-R3/2m

Fibre sheath material

metal silicone

Remarks

Pack quantity

1 pcs.