




## Flow transmitter with integrated backflow prevention

SBU12DI040KG/US

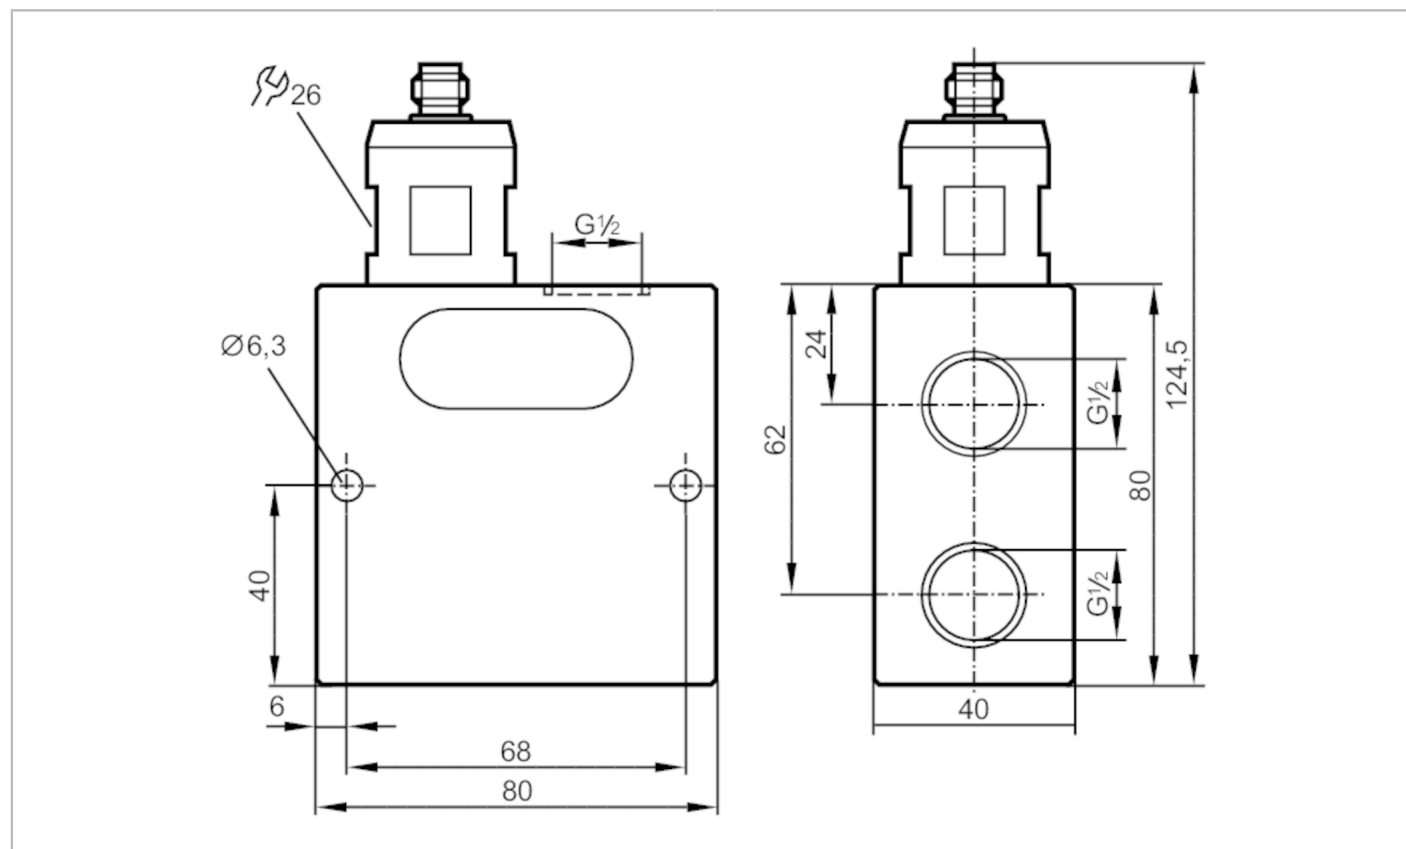

### Product characteristics

Measuring range	[l/min]	0.3...75
Process connection		G 1/2

### Application

Application	machine tools; Internal cooling of drill
Media	Liquids; water; glycol solutions; coolants
Medium temperature [°C]	0...60
Pressure rating [bar]	200
Pressure rating [MPa]	20

### Electrical data

Operating voltage tolerance	[%]	-15...10
Operating voltage	[V]	24 DC; (to SELV/PELV)
Current consumption	[mA]	10
Protection class		III
Reverse polarity protection		yes

### Outputs

Output signal		analogue signal
Analogue voltage output	[V]	0.5...10
Min. load resistance	[Ω]	10000
Short-circuit protection		yes
Overload protection		yes



## Flow transmitter with integrated backflow prevention

SBU12DI040KG/US

Measuring/setting range		
Measuring range	[l/min]	0.3...75
Flow range	[l/min]	75
Accuracy / deviations		
Repeatability		1
	[% of the final value]	
Measuring error		± 5
	[% of the final value]	
Response times		
Response time	[s]	< 0.01
Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-15...80
Protection		IP 65; IP 67
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF	[years]	15.78
Mechanical data		
Weight	[g]	738
Materials		aluminium anodised; PA
Materials (wetted parts)		stainless steel (316 / 1.4401); brass; aluminium anodised; PU; O-ring: FKM
Process connection		G 1/2
Switching cycles mechanical		10 million
Accessories		
Items supplied		sealing plugs
Remarks		
Remarks	Temperature changes slightly affect the specified standard settings for coolants.	
	For oils, the settings are influenced by temperature and viscosity.	
	Recommendation Use 200 micron filtration	
	All data refer to coolants (20 °C).	
Pack quantity		1 pcs.
Electrical connection		


Connector: 1 x M12; coding: A



## Flow transmitter with integrated backflow prevention

SBU12DI040KG/US

### Connection

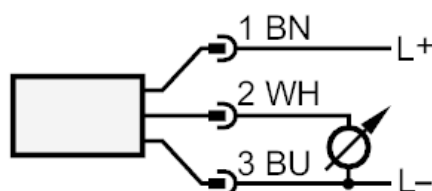

colours to DIN EN 60947-5-2

Core colours :

BN = brown  
BU = blue  
WH = white

### Diagrams and graphs

