


# SBG446



## Flow transmitter with integrated backflow prevention

SBG34HF010KG/US

Please note the changed housing design!

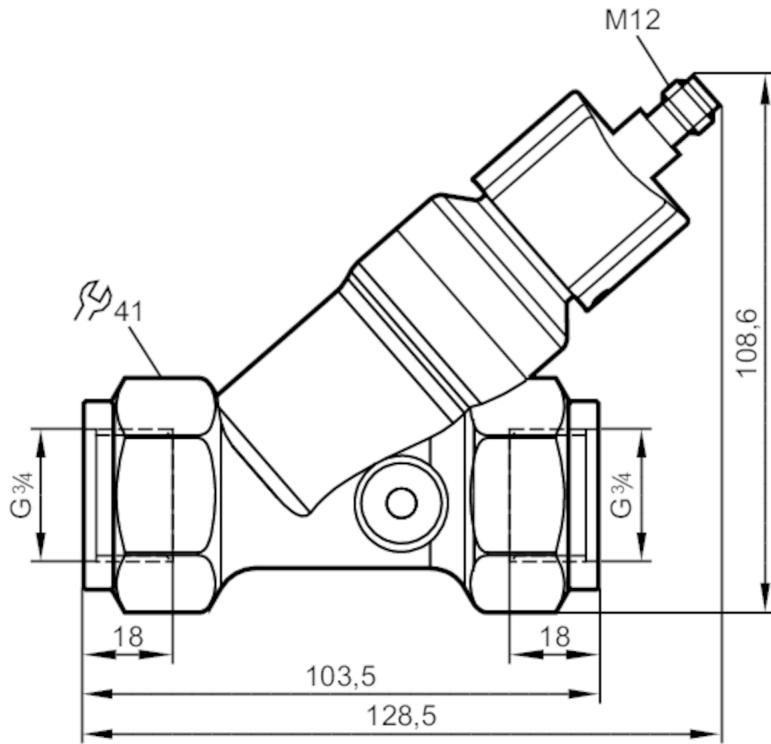

### Product characteristics

Measuring range	[l/min]	4...100
Process connection		threaded connection G 3/4

### Application

Media	Liquids; water; glycol solutions; coolants	
Medium temperature	[°C]	-10...100
Pressure rating	[bar]	25
Pressure rating	[MPa]	2.5

### Electrical data

Operating voltage	[V]	18...32 DC; (to SELV/PELV)
Current consumption	[mA]	< 35
Protection class		III
Reverse polarity protection		yes

### Outputs

Output signal	analogue signal	
Analogue current output	[mA]	4...20
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes

# SBG446



## Flow transmitter with integrated backflow prevention

SBG34HF010KG/US

Measuring/setting range				
Measuring range	[l/min]	4...100		
Accuracy / deviations				
Repeatability [% of the final value]		1		
Measuring error [% of the final value]		± 5		
Response times				
Response time	[s]	< 0.01		
Operating conditions				
Ambient temperature	[°C]	0...60		
Storage temperature	[°C]	-15...80		
Protection		IP 65; IP 67		
Tests / approvals				
EMC	DIN EN 61000-6-2			
	DIN EN 61000-6-3			
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)		
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)		
MTTF [years]		778		
Mechanical data				
Weight [g]		1297.6		
Materials	brass chemically nickel-plated; PP; stainless steel (316L/1.4404); aluminium anodised; PA			
Materials (wetted parts)	stainless steel (316 / 1.4401); brass; brass chemically nickel-plated; PP; PPS; O-ring: FKM			
Process connection	threaded connection G 3/4			
Switching cycles mechanical	10 million			
Remarks				
Remarks	Recommendation Use 200 micron filtration All data refer to water (20 °C).			
Notes	Please note the changed housing design!			
Pack quantity	1 pcs.			
Electrical connection				
Connector: 1 x M12; coding: A				
				


# SBG446



## Flow transmitter with integrated backflow prevention

SBG34HF010KG/US

### Connection

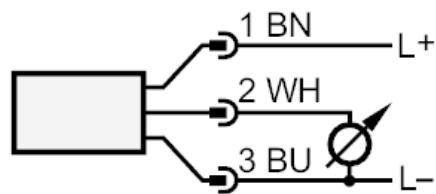


colours to DIN EN 60947-5-2

Core colours :

BN =	brown
BU =	blue
WH =	white

### Diagrams and graphs

#### Pressure loss

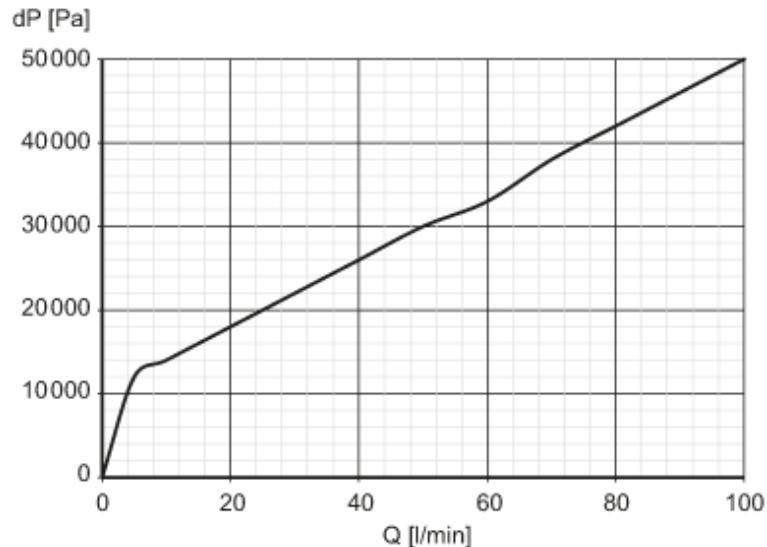

dP Pressure loss

Q volumetric flow quantity