


YDOAH040MSS0002H04STGH050MSS

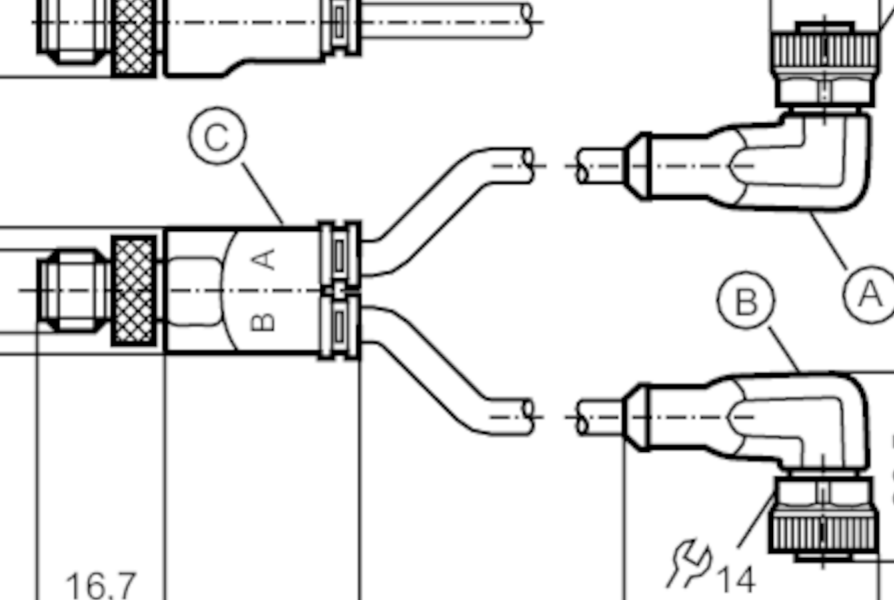

Technical drawing of the M12x1 1/2, showing three views: a side view, a front view, and a top view. The side view shows a cylindrical component with a threaded section and a flange. The front view shows the component with two curved ports labeled A and B, and a central port labeled C. The top view shows the component with a central port labeled A and two side ports labeled B and C. Dimensions are provided in millimeters (mm):

- Side view: Total length 46,7 mm, flange diameter $\varnothing 17$ mm, flange thickness 16,7 mm, and a section with a cross-hatch pattern.
- Front view: Total length L mm, flange diameter $\varnothing 17$ mm, flange thickness 16,7 mm, and a section with a cross-hatch pattern.
- Top view: Total length 36,5 mm, flange diameter $\varnothing 17$ mm, flange thickness 16,7 mm, and a section with a cross-hatch pattern.

Caracteristici speciale	fără silicon; Fara Halogen; contacte aurite
Fără silicon	da

Tensiune de lucru	[M]	< 250 AC / < 300 DC
-------------------	-----	---------------------

Temperatură de ambianță	[°C]	-25...90
Protecție		IP 68

Greutate	[g]	195,8
Material turnat		TPU
Material piuliță		alama, nichelată
Material de etansare		FKM
Numarul de porturi splitter box		2

Unitate de ambalare	1 buc.
---------------------	--------



Cablu de conexiune in Y

YDOAH040MSS0002H04STGH050MSS

Conectare electrică

Cablu: 2 m, PUR, Fara Halogen, negru, Ø 4,9 mm; 4 x 0,34 mm² (42 x Ø 0,1 mm)


Conectare electrică - Conector mama

Conector: 2 x M12, cu cot; codificare: A; Corp turnat: TPU, negru transparent; Blocare: alama, nichelată; Etanșare: FKM; Contacte: aurit



Conectare electrică - mufa

Conector: 1 x M12, drept; codificare: A; Corp turnat: TPU, negru; Blocare: alama, nichelată; Contacte: aurit



Racord

