





Absolute multiturn encoder with solid shaft

RM-8192-E05/R8B

Article no longer available - archive entry

Alternative articles: RM1104

When selecting an alternative article and accessories please note that technical data may differ!

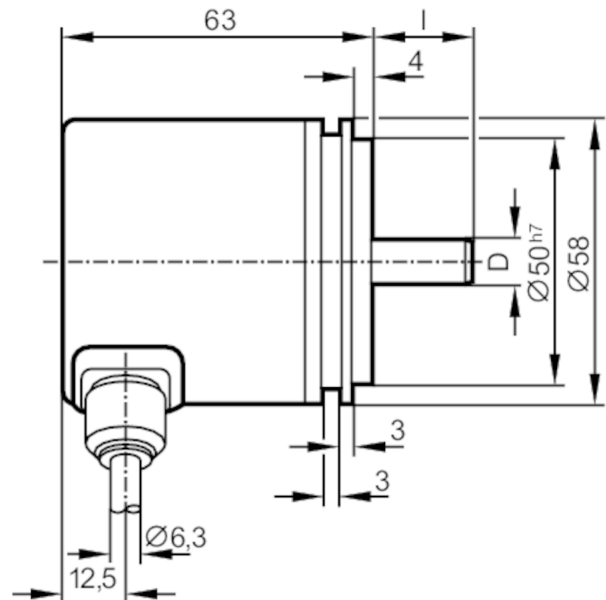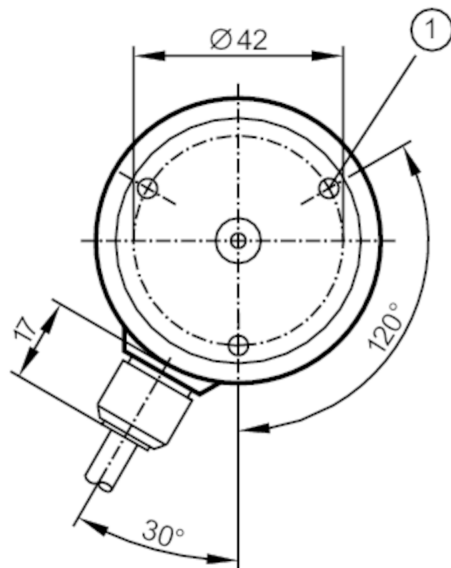

D	I
6 mm	10 mm
10 mm	20 mm

1 M4 Depth 6 mm



Product characteristics

Resolution	8192 steps; 4096 revolutions; 25 bit
Communication interface	fieldbus via gateway
Shaft design	solid shaft
Shaft diameter [mm]	10

Electrical data

Operating voltage tolerance	[%]	10
Operating voltage	[V]	5 DC; (from the gateway)
Current consumption	[mA]	< 200
Max. revolution electrical	[U/min]	6000

Outputs

Code	Dual code
Code signal	data input; TTL-compatible signals; clock and clock (inv.) from drivers to RS 485; data output; synchronous serial; TTL-compatible signals, data,



Absolute multiturn encoder with solid shaft

RM-8192-E05/R8B

	and data (inv.); incremental signals; 2 sinusoidal incremental signals (A and B) ; phase shifted by 90°; 1 Vss 512 signal periods per revolution	
Measuring/setting range		
Resolution	8192 steps; 4096 revolutions; 25 bit	
Interfaces		
Communication interface	fieldbus via gateway	
Operating conditions		
Ambient temperature	[°C]	-20...85
Storage temperature	[°C]	-30...100
Protection	IP 64	
Tests / approvals		
Shock resistance		100 g (6 ms)
Vibration resistance		10 g (55...2000 Hz)
Mechanical data		
Dimensions	[mm]	Ø 58 / L = 63
Materials	aluminium	
Max. revolution, mechanical [U/min]	10000	
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design	solid shaft	
Shaft diameter	[mm]	10
Shaft material	steel (1.4104)	
Max. shaft load axial (at the shaft end)	[N]	10
Max. shaft load radial (at the shaft end)	[N]	20

RM6111




Absolute multiturn encoder with solid shaft

RM-8192-E05/R8B

Electrical connection

Cable: 8 m, PUR; Maximum cable length: 100 m; radial

Connector: 1 x M23; Maximum cable length: 100 m



1	+5V sensor
2	n.c.
3	n.c.
4	0V sensor
5	n.c.
6	n.c.
7	+5V Up
8	clock
9	clock inverted
10	0V Un
11	screen
12	B (+)
13	B (-)
14	data
15	A (+)
16	A (-)
17	data inverted