


ANT513



RFID read/write head HF

DTRHF MCRWIDUS03

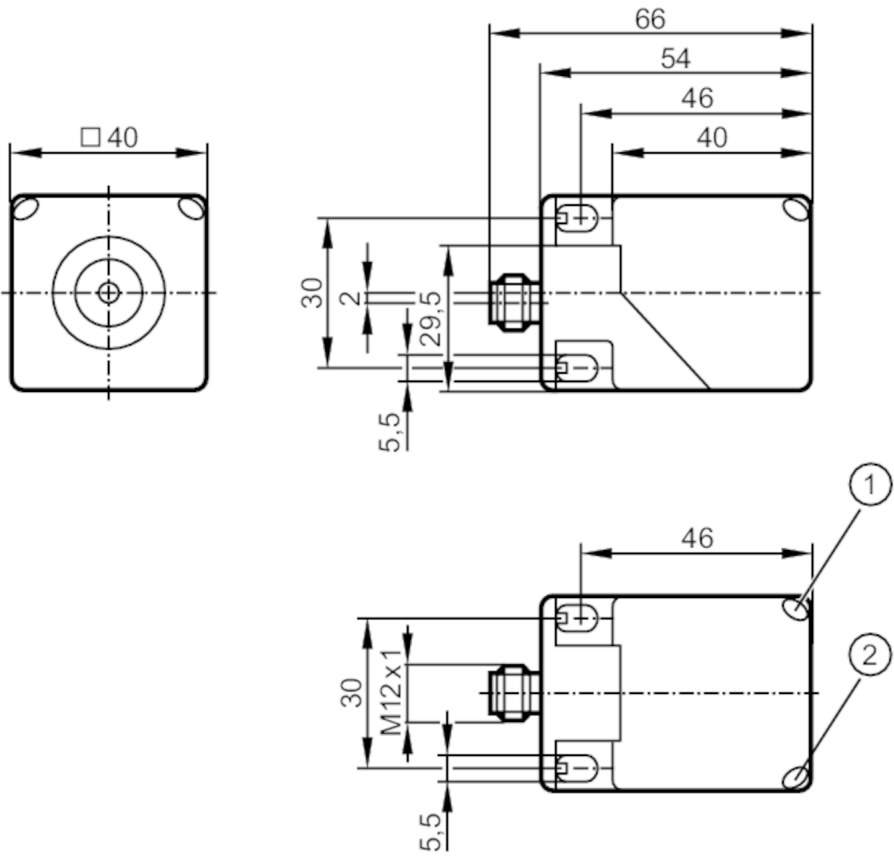

- 1 LED yellow
- 2 LED green



Application		
Application	detection of objects on transport equipment	
Radio approval for	USA; Canada; EU/RED; Australia; Japan; China; Taiwan; India; South Korea; Singapore; Ukraine; Malaysia; Brazil; Mexico; New Zealand; В'єтнам	
Note on radio approval	The list of countries applying the European Radio Equipment Directive 2014/53/EU (RED) can be found under “Downloads”.	
Electrical data		
Operating voltage	[V]	24 DC
Current consumption	[mA]	< 50
Protection class		III
Operating frequency	[MHz]	13,56
RFID standard		ISO 15693
Detection zone		
Travel speed	[m/s]	< 1
Distance write/read head front	[mm]	250
Distance write/read head side	[mm]	300

ANT513



RFID read/write head HF

DTRHF MCRWIDUS03

Distance to the ID tag	[mm]	read	:	≤ 60
		static		
		write	:	≤ 60
		static		
		reference tag	:	E80370

Interfaces

Communication interface	DATA / DTE10x
-------------------------	---------------

Operating conditions

Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...80
Protection		IP 67; IP 69K

Tests / approvals

Shock resistance		EN 60068-2-29	40 g 6 ms
		EN 60068-2-27	50 g 11 ms
Vibration resistance		EN 60068-2-6	20 g 10...55 Hz
MTTF	[ANN]		557

Mechanical data

Weight	[g]	165.55
Housing		rectangular
Sensing face		5 positions selectable
Mounting		flush mountable
Dimensions	[mm]	40 x 40 x 54
Materials		housing: PA; metal parts: stainless steel

Displays / operating elements

Display	operation	1 x LED, green
	tag communication	1 x LED, yellow

Remarks

Remarks	For the distances to other ID tags see the respective data sheet (E803xx)
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12, rotatable, locking; coding: A





RFID read/write head HF

DTRHF MCRWIDUS03

Connection

