


DTM434



RFID read/write head with CAN interface and CANopen protocol

DTMHF IBRWC0US03

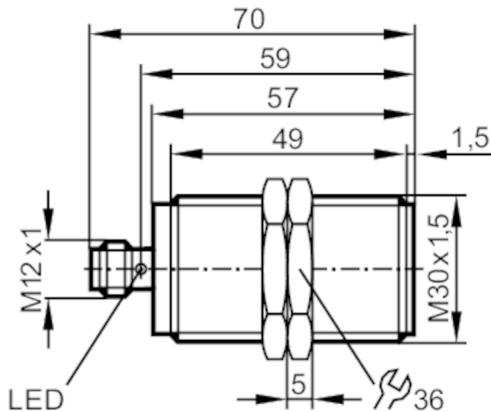

Application

| | |
|------------------------|--|
| Radio approval for | USA; Canada; EU/RED; Australia; Japan; China; Taiwan; India; Singapore; Ukraine; Brazil |
| Note on radio approval | The list of countries applying the European Radio Equipment Directive 2014/53/EU (RED) can be found under "Downloads". |

Electrical data

| | | |
|---------------------|-------|---------------------------|
| Operating voltage | [V] | 9...32 DC |
| Current consumption | [mA] | < 50 (24 V) / < 80 (12 V) |
| Protection class | | III |
| Operating frequency | [MHz] | 13,56 |
| RFID standard | | ISO 15693 |

Detection zone

| | | |
|--------------------------------|------|------|
| Distance write/read head front | [mm] | 120 |
| Distance write/read head side | [mm] | 60 |
| Distance to the ID tag | [mm] | ≤ 30 |

Interfaces

| | |
|-------------------------|---------|
| Communication interface | CAN |
| Protocol | CANopen |

Operating conditions

| | | |
|---------------------|------|---------------|
| Ambient temperature | [°C] | -40...85 |
| Storage temperature | [°C] | -40...85 |
| Protection | | IP 67; IP 69K |

Tests / approvals

| | | |
|----------------------|---------------|-----------------------------|
| Shock resistance | EN 60068-2-27 | 40 g 6 ms / repetitive |
| | EN 60068-2-27 | 50 g 11 ms / not repetitive |
| Vibration resistance | EN 60068-2-6 | 20 g 10...2000 Hz |
| MTTF | [ANN] | 477 |

DTM434



RFID read/write head with CAN interface and CANopen protocol

DTMHF IBRWC0US03

Mechanical data

| | | |
|--------------------|------|--|
| Weight | [g] | 198.5 |
| Housing | | threaded type |
| Dimensions | [mm] | M30 x 1.5 / L = 70 |
| Thread designation | | M30 x 1.5 |
| Materials | | housing: stainless steel; Protective cover: PPS; LED window: PEI |

Displays / operating elements


| | | |
|---------|---------------------|-------------------------|
| Display | Preoperational Mode | 1 x LED, green lights |
| | Operational Mode | 1 x LED, green flashing |
| | errors | 1 x LED, red flashing |
| | tag communication | 1 x LED, yellow lights |

Remarks

| | |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

Electrical connection

Connector: 1 x M12; coding: A



| | |
|---|----------|
| 1 | not used |
| 2 | U+ |
| 3 | GND |
| 4 | CAN_H |
| 5 | CAN_L |