




Inductive sensor

IGK3008BBPKG/0,47M/PH/DT04-3P

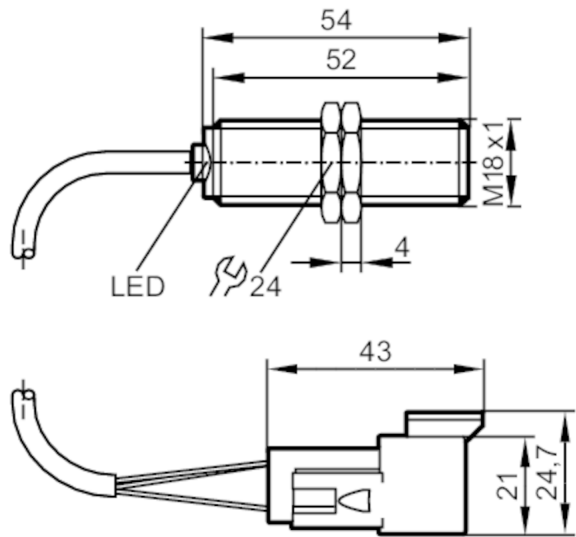

Product characteristics		
Electrical design		PNP
Output function		normally open
Sensing range	[mm]	8
Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 54
Application		
Special feature		Increased sensing range
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 15
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	500
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Sensing range	[mm]	8

IG6118



Inductive sensor

IGK3008BBPKG/0,47M/PH/DT04-3P

Operating distance	[mm]	0...6.48
Increased sensing range		yes

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3	
Hysteresis	[X01]	1...20

Operating conditions

Ambient temperature	[°C]	-40...70
Protection		IP 69K

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5 kV mains line to line
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
MTTF	[ANN]	1610

Mechanical data

Weight	[g]	123
Housing		threaded type
Mounting		flush mountable
Dimensions	[mm]	M18 x 1 / L = 54
Thread designation		M18 x 1
Materials		housing: brass white bronze coated; sensing face: PBT; end cap: TPU

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Аксессуары

Items supplied	lock nuts: 2	
----------------	--------------	--


Remarks

Pack quantity	1 pcs.	
---------------	--------	--

Electrical connection - plug

Cable: 0.47 m, PUR, Ø 5.4 mm; 3 x 0.5 mm²

Connector: 1 x DEUTSCH connector (DT04-3P)



IG6118



Inductive sensor

IGK3008BBPKG/0,47M/PH/DT04-3P

Connection

