

MQ2003



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/ZH



- 1 LED green
2 LED yellow



Product characteristics

Electrical design	PNP/NPN; (parameterisable)
Output function	normally open / normally closed; (parameterisable)
Sensing range [mm]	5
Communication interface	IO-Link
Housing	rectangular
Dimensions [mm]	20 x 8 x 32

Application

Special feature	anti-spatter
Media	ferrous only

Electrical data

Operating voltage [V]	10...30 DC
Rated insulation voltage [V]	60
Current consumption [mA]	< 30
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 0.3

Outputs

Electrical design	PNP/NPN; (parameterisable)
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2.5
Max. leakage current [mA]	0.1



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/ZH

Permanent current rating of switching output DC	[mA]	100
Short-time current rating of switching output	[mA]	100
Switching frequency DC	[Hz]	200
Notes on switching frequency	[Hz]	suppression of extraneous fields: 10
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	5
Real sensing range Sr	[mm]	5 ± 10 %
Operating distance	[mm]	0...4.05

Accuracy / deviations

Correction factor		steel: 1
Hysteresis	[X01]	< 10
Switch point drift	[X01]	-10...20
Repeatability	[X01]	10

Software / programming

Parameter setting options	hysteresis / window; switch-off delay; Затримка включення та вимкнення; switch-on operations; Teach function	
---------------------------	--	--

Interfaces

Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
Profiles	Smart Sensor: Identification and diagnosis; Multi-channel, two setpoint switching sensor, type 0 Generic Profiled Sensor; Teach Channel	
SIO mode	yes	
Required master port type	A	
Min. process cycle time	[ms]	9.6
IO-Link process data (cyclical)	function	bit length
	process value	16
	device status	4
	binary switching information	4
IO-Link functions (acyclical)	application specific tag; operating hours counter; switching cycles counter	
Supported DeviceIDs	Type of operation	DeviceID
	default	829
Note	For further information please see the IODD PDF file under "Downloads"	

Operating conditions

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-30...85
Protection		IP 65; IP 67

MQ2003



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/ZH

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
Vibration resistance	EN 60068-2-6 Fc	20 g (10...3000 Hz) / 50 sweep cycles, 1 octave per minute, in 3 axes
Shock resistance	EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
Continuous shock resistance	EN 60068-2-27	40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes
MTTF	[ANN]	1976
UL approval	Ta	-25...60 °C
	Enclosure type	Type 1
	подача напруги	Limited Voltage/Current
	UL Approval no.	C011
	File number UL	E174191
Mechanical data		
Weight	[g]	81.7
Housing		rectangular
Mounting		flush mountable
Dimensions	[mm]	20 x 8 x 32
Materials		diecast zinc anti-spatter; LED window: TPU; potting: PUR
Displays / operating elements		
Display	Display operation	1 x LED, green
	switching status	1 x LED, yellow
Remarks		
Pack quantity		1 pcs.

MQ2003





Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/ZH

Electrical connection

Cable: 2 m, PUR, Ø 4.9 mm; flame-retardant (IEC 60332-2, UL: FT2); 3 x 0.34 mm² / resistant to welding sparks

Connection

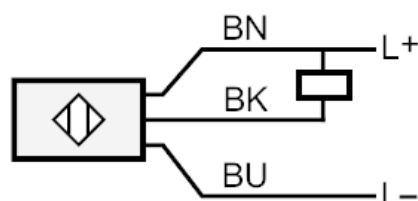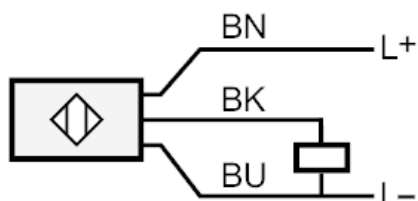

	Core colours
BK	black OUT / IO-Link
BN	brown
BU	blue