
OGE103

Through-beam sensor receiver

OGE-HNKG/US





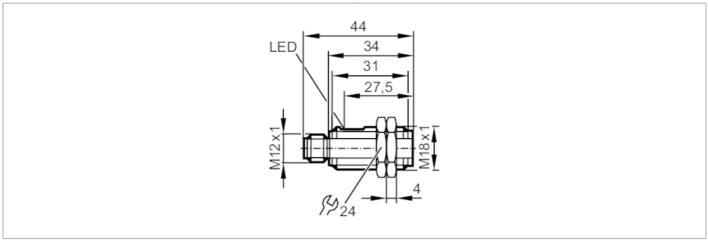

Product characteristics		
Type of light		red light
Housing		threaded type
Application		
Function principle		Through-beam sensor
Electrical data		
Operating voltage	[V]	1030 DC
Current consumption	[mA]	8
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Outputs		
Electrical design		NPN
Output function		light-on mode
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Overload protection		yes
Detection zone		
Transmitter / receiver		receiver
Range	[m]	< 8
Range adjustable		no
Operating conditions		
Ambient temperature	[°C]	-2560
Protection		IP 67; (in conjunction with a corresponding connector)
Tests / approvals		
EMC		EN 60947-5-2

OGE103

Through-beam sensor receiver





MTTF	[ANN]	1320					
Mechanical data							
Weight	[g]	14.7					
Housing			threaded type				
Dimensions	[mm]	M18 x 1 / L = 44					
Thread designation		M18 x 1					
Materials		housing: ABS					
Lens material		РММА					
Displays / operating elements							
Display		switching status	1 x LED, yellow				
Аксесуари							
Items supplied			lock nuts: 2				
Remarks							
Pack quantity			1 pcs.				

Electrical connection

Connector: 1 x M12; coding: A



Connection

