



Article no longer available - archive entry

Alternative articles: OGS501

When selecting an alternative article and accessories please note that technical data may differ!

No scale drawing available



Product characteristics

Type of light	infrared light
Housing	threaded type

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 17
Protection class		II
Reverse polarity protection		yes
Type of light		infrared light
Wave length	[nm]	880

Outputs

Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Transmitter / receiver	transmitter
Range [m]	< 15
Range adjustable	no

OG5100



Through-beam sensor transmitter

OGS-00KG/10M

Max. light spot diameter	[mm]	2000
Light spot dimensions refer to		at maximum range

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data

Housing		threaded type
Dimensions	[mm]	M18 x 1
Thread designation		M18 x 1
Materials		PBT
Lens material		PMMA

Displays / operating elements

Display	operation	1 x LED, green
---------	-----------	----------------

Аксессуары

Items supplied		lock nuts: 2
----------------	--	--------------


Remarks

Remarks		operating voltage "supply class 2" according to cULus
Pack quantity		1 pcs.

Electrical connection

Cable: 10 m, PVC; 2 x 0.34 mm²

Connection

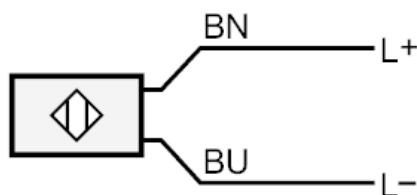

BN = Core colours :
brown
BU = blue