


Through-beam sensor receiver

OGE-FPKG/V4A/6M

Article no longer available - archive entry

Alternative articles: OGE302 or OGE303

When selecting an alternative article and accessories please note that technical data may differ!

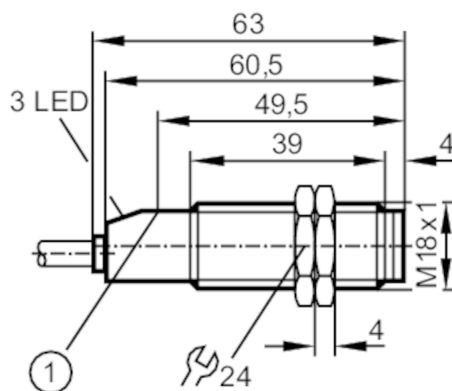

1 pushbutton

Product characteristics

Type of light	infrared light
Housing	threaded type

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 22
Protection class		II
Reverse polarity protection		yes
Type of light		infrared light
Wave length	[nm]	880

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Short-time current rating of switching output	[mA]	200
Switching frequency DC	[Hz]	500
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Transmitter / receiver	receiver
------------------------	----------



Through-beam sensor receiver

OGE-FPKG/V4A/6M

Range	[m]	< 15
Range adjustable		yes

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 68; IP 69K

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data

Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 63
Thread designation		M18 x 1
Materials		stainless steel (1.4404 / 316L); PBT
Lens material		PMMA

Displays / operating elements

Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red

Аксессуары

Items supplied		lock nuts: 2
----------------	--	--------------



Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection

Cable: 6 m, PVC; 3 x 0.34 mm²

Connection

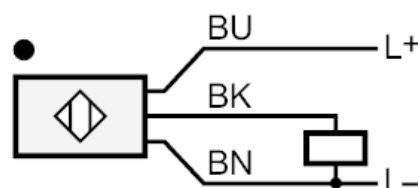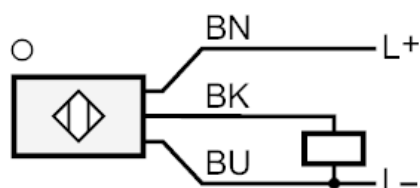

Core colours :

BN = brown

BU = blue

BK = black



Through-beam sensor receiver

OGE-FPKG/V4A/6M

Diagrams and graphs

excess gain graph

