


Through-beam sensor transmitter

OTS-00KG/6M

Article no longer available - archive entry

Alternative articles: OT5008

When selecting an alternative article and accessories please note that technical data may differ!

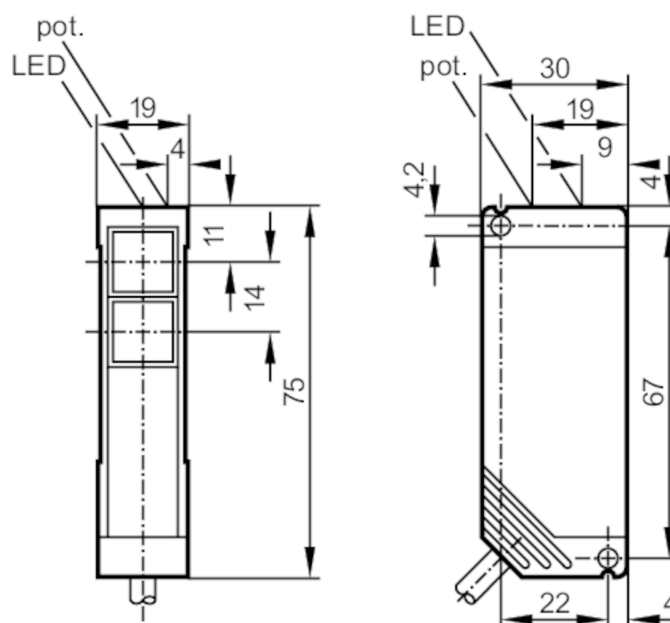

1 potentiometer
one transmitting diode each in upper and lower lens



Product characteristics

Type of light	infrared light
Housing	rectangular

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage	[V]	10...55 DC
Current consumption	[mA]	20; ((24 V))
Protection class		II
Reverse polarity protection		yes
Type of light		infrared light
Wave length	[nm]	880

Outputs

Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Transmitter / receiver	transmitter
------------------------	-------------



Through-beam sensor transmitter

OTS-00KG/6M

Range	[m]	< 10
Range adjustable		no
Max. light spot diameter	[mm]	524
Light spot dimensions refer to		at maximum range

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
-----	--------------	--

Mechanical data

Housing		rectangular
Dimensions	[mm]	75 x 19 x 30
Materials		PBT
Lens material		PMMA

Displays / operating elements

Display	operation	1 x LED, green
---------	-----------	----------------

Аксессуары

Items supplied	Angle bracket: 1, E20441
	screwdrivers


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 6 m, PVC; 2 x 0.34 mm²

Connection

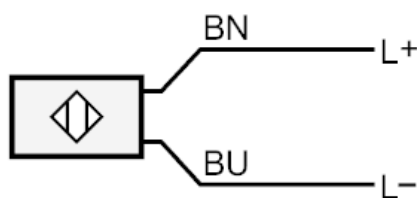

BN = Core colours : brown
 BU = blue