




Through-beam sensor receiver

OUE-HNKG/US-100-DNO

Article no longer available - archive entry

Alternative articles: OU5009

When selecting an alternative article and accessories please note that technical data may differ!

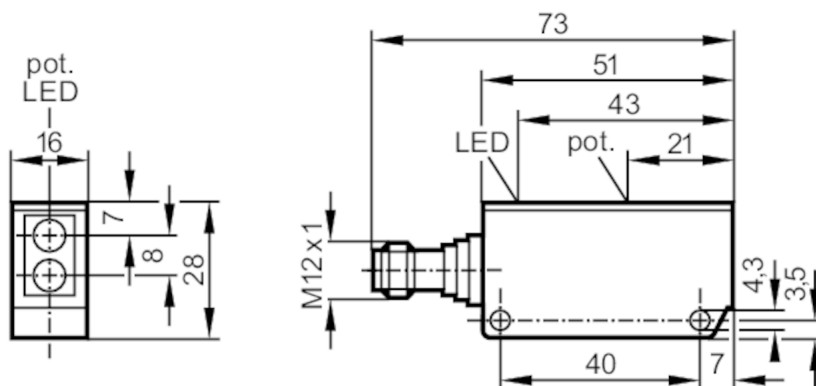

receiver in upper lens

Product characteristics

Housing rectangular

Application

Function principle Through-beam sensor

Electrical data

Operating voltage [V]	10...50 DC
Current consumption [mA]	20; ((24 V))
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	NPN
Output function	light-on mode
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	140
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Transmitter / receiver	receiver
Range [m]	< 6
Range adjustable	yes

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 67



Through-beam sensor receiver

OUE-HNKG/US-100-DNO

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data

Housing		rectangular
Dimensions	[mm]	28 x 16 x 51
Materials		PPO modified
Lens material		glass

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Аксессуары

Items supplied		Angle bracket
----------------	--	---------------

Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection

Connector: 1 x M12; coding: A

Connection

