


# SF6200



## Flow sensor for connection to an evaluation unit

SFG10ABB /US-100

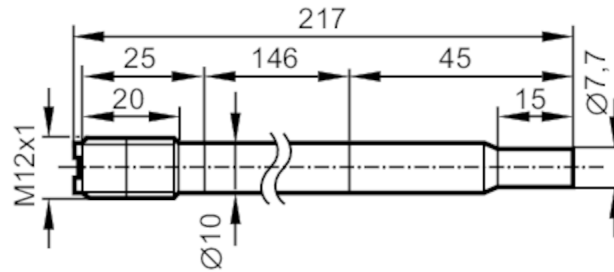

### Product characteristics

Probe length L	[mm]	15...156
Process connection		Ø 10 mm

### Application

Special feature		Gold-plated contacts
Application		high-temperature range
Installation		sensor suitable for clamp fitting
Media		Liquids; Gases
Medium temperature	[°C]	-25...80
Pressure rating	[bar]	30

### Liquids

Application		high-temperature range
Installation		sensor suitable for clamp fitting
Medium temperature	[°C]	-25...80

### Gases

Medium temperature	[°C]	-25...80
--------------------	------	----------

### Electrical data

Connection to control monitor		VS3000
-------------------------------	--	--------

### Measuring/setting range

Probe length L	[mm]	15...156
Liquids		
Setting range	[cm/s]	3...300
Greatest sensitivity	[cm/s]	3...60
Gases		
Setting range	[cm/s]	200...3000
Greatest sensitivity	[cm/s]	200...800

### Accuracy / deviations

Temperature gradient	[K/min]	30
----------------------	---------	----

### Response times

Response time	[s]	1...10
---------------	-----	--------

### Liquids


Response time	[s]	1...10
---------------	-----	--------

# SF6200



## Flow sensor for connection to an evaluation unit

SFG10ABB /US-100

Gases		
Response time	[s]	1...10
Operating conditions		
Protection		IP 67
Tests / approvals		
Shock resistance	DIN IEC 68-2-27	40 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	10 g (55...2000 Hz)
MTTF	[ANN]	8583
Mechanical data		
Weight	[g]	89
Dimensions	[mm]	Ø 10
Materials		stainless steel (1.4404 / 316L) several parts, welded
Materials (wetted parts)		stainless steel (1.4404 / 316L) several parts, welded
Process connection		Ø 10 mm
Аксессуары		
Accessories (optional)		Clamp adapter: R 1/2, E40160
		Clamp adapter: 1/2" NPT, E40174
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: gold-plated; Maximum cable length: 100 m		
		


# SF6200



## Flow sensor for connection to an evaluation unit

SFG10ABB /US-100

### Connection

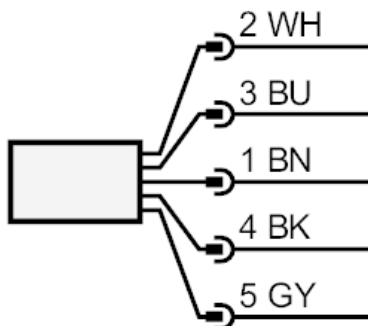

BN =	Core colours :	brown
BU =		blue
BK =		black
WH =		white
GY =		grey