


## Flow sensor for connection to an evaluation unit

STR14ABBE1

Article no longer available - archive entry

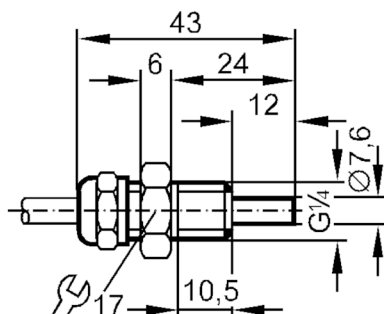

## Product characteristics

Process connection	G 1/4 external thread
--------------------	-----------------------

## Application

Application	Ex zone 1
Medium temperature [°C]	-25...80
Pressure rating [bar]	30

## Liquids

Application	Ex zone 1
Medium temperature [°C]	-25...80

## Gases

Medium temperature [°C]	-25...80
-------------------------	----------

## Electrical data

Connection to control monitor	VS 0100 Ex
-------------------------------	------------

## Measuring/setting range

## Liquids

Setting range [cm/s]	3...300
Greatest sensitivity [cm/s]	3...60

## Gases

Setting range [cm/s]	5...1500
----------------------	----------

## Accuracy / deviations

Temperature gradient [K/min]	15
------------------------------	----

## Response times

Response time [s]	1...10
-------------------	--------

## Liquids

Response time [s]	1...10
-------------------	--------

## Gases

Response time [s]	1...10
-------------------	--------

## Operating conditions

Protection	IP 67
------------	-------

## Mechanical data

Housing	threaded type
---------	---------------

# ST2210



## Flow sensor for connection to an evaluation unit

STR14ABBE1

Materials	stainless steel (1.4571/316Ti )
Process connection	G 1/4 external thread


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, Silflex-PUR; Maximum cable length: 100 m; 4 x 0.25 mm²

Connection

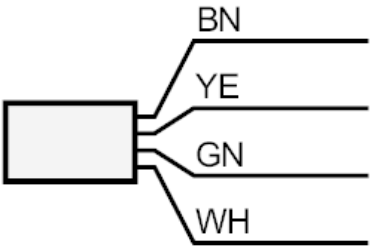

	Core colours :
BN =	brown
GN =	green
WH =	white
YE =	yellow