


Temperature sensor with process connection

TM-000KLER12-/US/

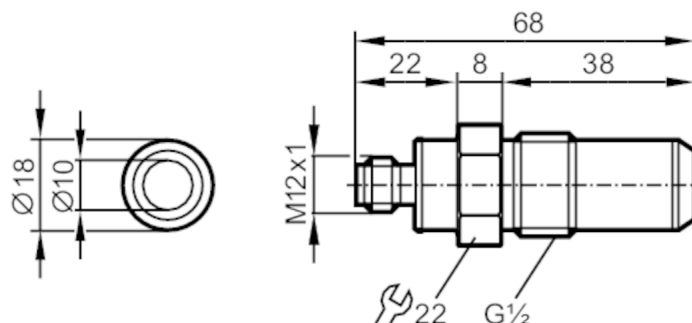

EC 1935/2004 

Product characteristics

Measuring range	[°C]	-50...140
Process connection		threaded connection G 1/2 sealing cone flush mountable

Application

Special feature		Gold-plated contacts
Measuring element		1 x Pt 100; (to DIN EN 60751, class A)
Media		liquids and gases
Medium temperature	[°C]	< 100; (< 5 min: 150)
Pressure rating	[bar]	16

Electrical data

Protection class		III
------------------	--	-----

Measuring/setting range

Measuring range	[°C]	-50...140
-----------------	------	-----------

Accuracy / deviations

Accuracy	[K]	± (0,15 K + 0,002 x t)
----------	-----	-------------------------

Response times

Dynamic response T05 / T09	[s]	10 / 40; (for water (70 °C; 0,04 m/s))
----------------------------	-----	--

Operating conditions

Ambient temperature	[°C]	-20...70
Storage temperature	[°C]	-40...100
Protection		IP 69K; (in conjunction with a corresponding connector)

Tests / approvals

MTTF	[ANN]	12683.9
------	-------	---------

Mechanical data

Weight	[g]	126.5
Materials		stainless steel (1.4404 / 316L); PEEK
Materials (wetted parts)		stainless steel (1.4404 / 316L); PEEK
Tightening torque	[Nm]	10
Process connection		threaded connection G 1/2 sealing cone flush mountable

TM4599



Temperature sensor with process connection

TM-000KLER12-/US/

Remarks

Pack quantity

1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

