


TS2256



Temperature cable sensor with process connection

TS-200KCID06-...../US/ IV

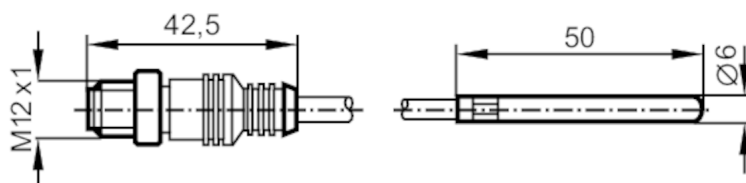

Product characteristics

Measuring range	-50...250 °C	-58...482 °F
Process connection	Ø 6 mm	
Installation length EL [mm]	50	

Application

Measuring element	1 x Pt 100; (to DIN EN 60751, class A)
Media	liquids and gases
Minimum installation depth [mm]	15

Electrical data

Protection class	III
------------------	-----

Measuring/setting range

Probe length L	[mm]	50	
Measuring range		-50...250 °C	-58...482 °F
Note on measuring range		stationary: 280 °C / 536 °F (10000 h)	

Accuracy / deviations

Accuracy [K]	$\pm (0,15 K + 0,002 x t)$
--------------	-----------------------------

Response times

Dynamic response T05 / T09 [s]	11 / 37; (to DIN EN 60751)
--------------------------------	----------------------------

Operating conditions

Protection	IP 67
------------	-------

Tests / approvals

MTTF [ANN]	11415.5
------------	---------

Mechanical data

Weight [g]	72.7
Dimensions [mm]	Ø 6
Materials	stainless steel (1.4571/316Ti); PFA/PTFE
Materials (wetted parts)	stainless steel (1.4571/316Ti)
Process connection	Ø 6 mm
Probe diameter [mm]	6
Installation length EL [mm]	50

Remarks

Remarks	The values for accuracy apply to flowing water.
Pack quantity	1 pcs.

TS2256



Temperature cable sensor with process connection

TS-200KCID06-...../US/ IV

Electrical connection

Cable: 2 m, PTFE

Connector: 1 x M12; coding: A



Connection

