

AC1321




AS-Interface CANopen gateway with PLC

ControllerE 1Mstr CO RS232

Article no longer available - archive entry

Alternative articles: AC1331
When selecting an alternative article and accessories please note that technical data may differ!

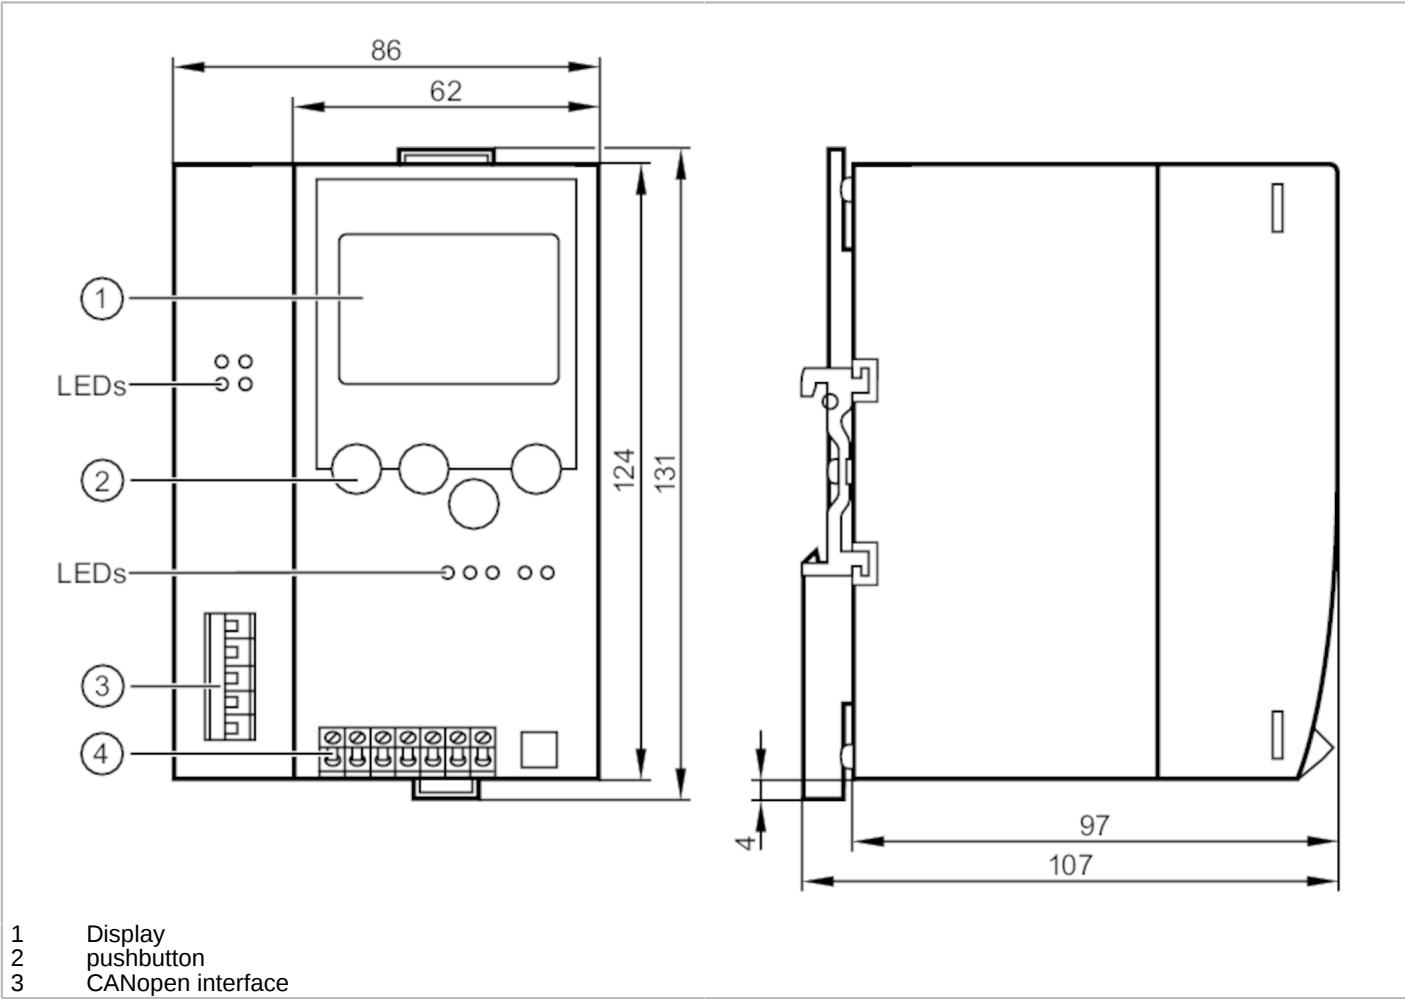

Application		
Application	decentralized controller; CANopen gateway	
Electrical data		
Operating voltage	[V]	24 DC
Current consumption	[mA]	< 500
Max. current consumption from AS-i	[mA]	10
Max. power consumption	[VA]	10
Number of AS-i masters		1
Interfaces		
Communication interface	RS232; CAN	
CAN		
Number of CAN interfaces		1



AS-Interface CANopen gateway with PLC

ControllerE 1Mstr CO RS232

Protocol	CANopen
Usage type	Data transmission
RS232	
Number of R232 interfaces	1
Transmission rate	9600...115200 Baud
Type of connector	RJ11
Usage type	Programming
Note on interfaces	electrically isolated

Operating conditions

Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-20...70
Max. relative air humidity	[%]	95
Protection		IP 20

AS-i classification

AS-i version	2.1
AS-i master profile	M3

Mechanical data

Housing	housing for DIN rail mounting
Material	aluminum; steel sheet galvanized

Displays / operating elements

Display	Function	3 x LED, red
		2 x LED, green
		2 x LED, yellow
		full graphic LCD display

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection**Connection**