


E11570



Wiring block

ZDO6H057MSS00,5H09

Article no longer available - archive entry

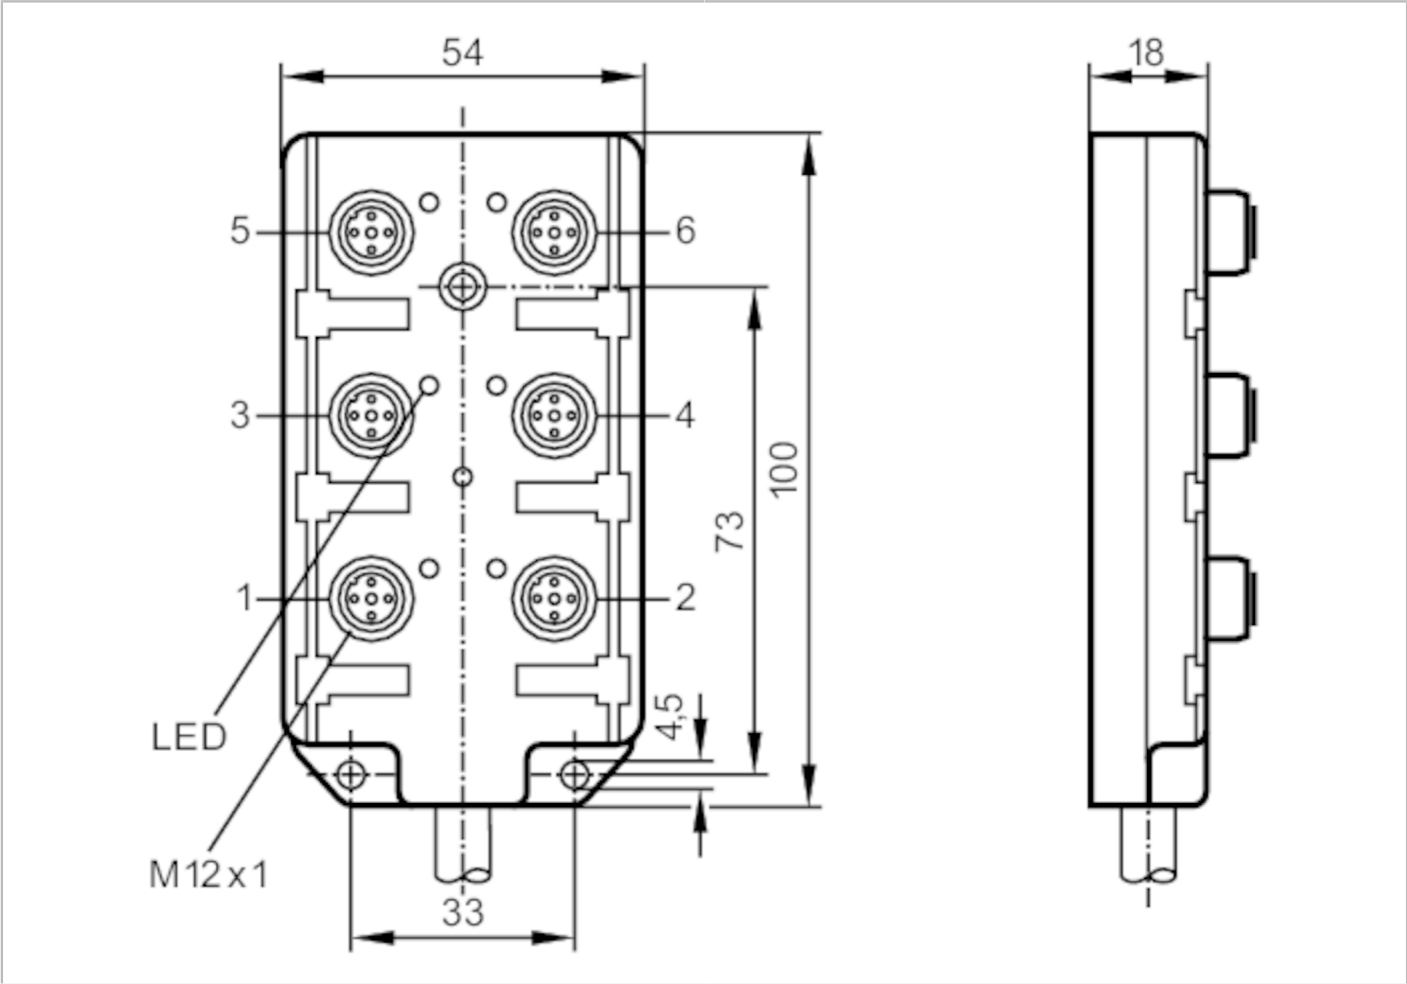

Application		
System		Free from silicone; Halogen-free; gold-plated contacts
Free from silicone		yes
Electrical data		
Operating voltage	[V]	10...30 DC
Protection class		II
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12
Operating conditions		
Ambient temperature	[°C]	-15...80
Protection		IP 67
Mechanical data		
Dimensions	[mm]	18 x 54 x 100
Material		TPU (urethane)
Molded-body material		TPU (urethane)
Number of ports splitter box		6
Connector type		M12

E11570



Wiring block

ZDO6H057MSS00,5H09

Displays / operating elements

Display	Switching status	6 x LED, yellow
	Power	1 x LED, green

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection


Cable: 0.5 m, PUR, Halogen-free, black, Ø 9 mm; 6 x 0.34 mm² + 3 x 0.75 mm²

Electrical connection - slot

Connector: 6 x M12; coding: A; Moulded body: TPU (urethane); Contacts: gold-plated; Tightening torque: 0.5 Nm



Connection

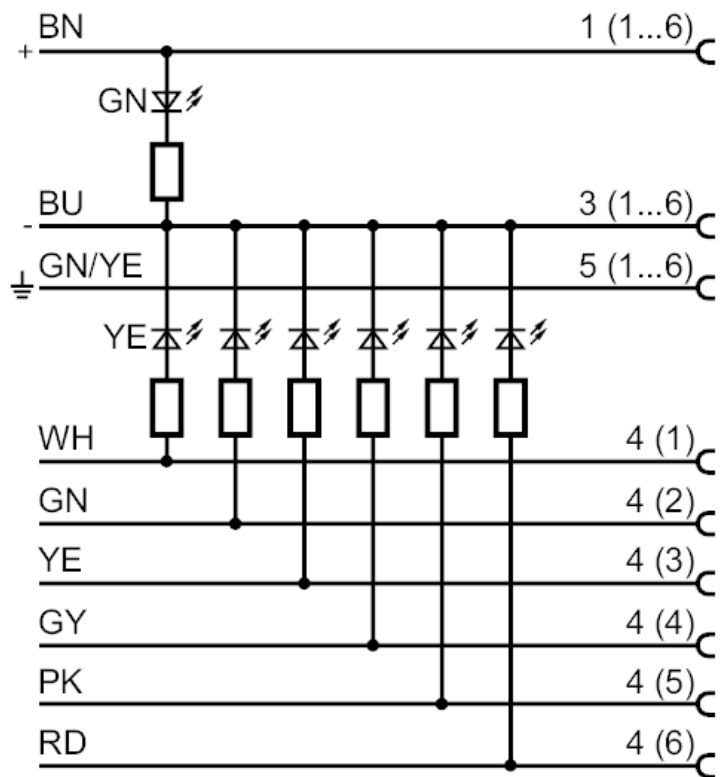

BN =	Core colors :
BU =	brown
GN =	blue
GN/YE =	green
GY =	green/yellow
PK =	grey
RD =	pink
WH =	red
YE =	white
	yellow