


# E11656



## Female cordset

ADOAA030MSS0005H03

Article no longer available - archive entry

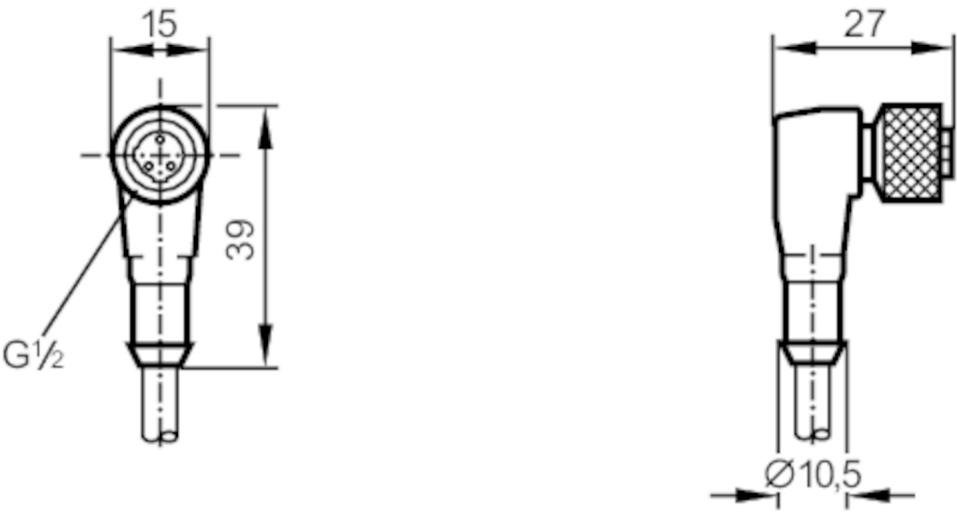

| Application          |                         |
|----------------------|-------------------------|
| System               | Halogen-free            |
| Electrical data      |                         |
| Operating voltage    | [V] < 250 AC / < 300 DC |
| Operating conditions |                         |
| Ambient temperature  | [°C] -25...90           |
| Protection           | IP 67                   |
| Mechanical data      |                         |
| Material             | TPU (urethane)          |
| Molded-body material | TPU (urethane)          |
| Material nut         | brass, nickel-plated    |
| Remarks              |                         |
| Pack quantity        | 1 pcs.                  |

# E11656



## Female cordset

ADOAA030MSS0005H03

### Electrical connection


Cable: 5 m, PUR, Halogen-free, black, Ø 4.6 mm; 3 x 0.5 mm<sup>2</sup> (16 x Ø 0.2 mm )

### Electrical connection - Socket

Connector: 1 x 1/2", angled; coding: C; Moulded body: TPU (urethane); Locking: brass, nickel-plated



### Connection

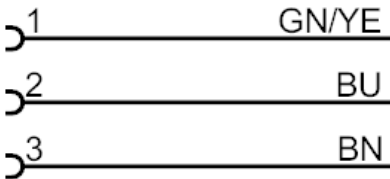

|      |               |
|------|---------------|
| BN = | Core colors : |
| BU = | brown         |
| GN = | blue          |
| YE = | green         |
|      | yellow        |