


FE-30-A-A-R3/3m

Article no longer available - archive entry

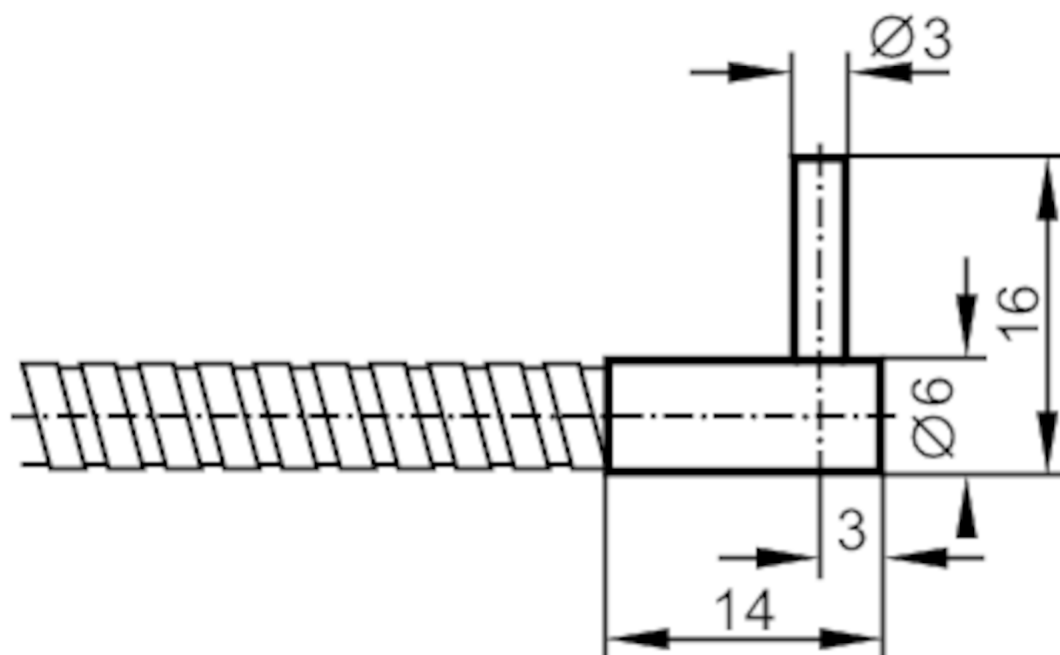

Function principle	Through-beam sensor
--------------------	---------------------

Function principle	Through-beam sensor
--------------------	---------------------

Range with fiber optic	OIF
------------------------	-----

Range with fiber optic	OIF
------------------------	-----

Range of fiber optics	[mm]	64
-----------------------	------	----

Range of fiber optics	[mm]	64
-----------------------	------	----

Ambient temperature	[°C]	-40...290
---------------------	------	-----------

Ambient temperature	[°C]	-40...290
---------------------	------	-----------

Version of sensing head	angled
-------------------------	--------

Version of sensing head	angled
-------------------------	--------

Total length	[mm]	3000
--------------	------	------

Min. bending radius	[mm]	30
---------------------	------	----

Material	Adapter: PA
----------	-------------

Fiber material	glass
----------------	-------

Fiber head material	aluminum
---------------------	----------

Fiber sheath material	aluminum
-----------------------	----------

Pack quantity	1 pcs.
---------------	--------

Pack quantity	1 pcs.
---------------	--------