
E20345

Fiber optic through beam sensor

FE-30-A-A-E3/1m



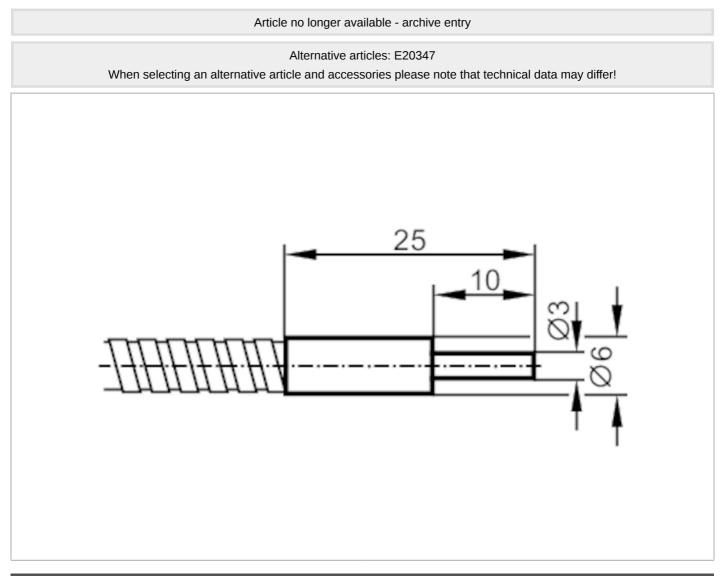

Application		
Function principle		Through-beam sensor
Monitoring range		
Range with fiber optic amplifier type		OIF
OIF		
Range of fiber optics	[mm]	100
Operating conditions		
Ambient temperature	[°C]	-40290
Mechanical data		
Version of sensing head		straight
Sensing head diameter	[mm]	3
Total length	[mm]	1000
Min. bending radius	[mm]	30
Material		Adapter: PA
Fiber material		glass
Fiber head material		aluminum

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — EN-US — E20345-00 — 04.06.2003 — 🗵

E20345

Fiber optic through beam sensor

FE-30-A-A-E3/1m



Fiber sheath material	aluminum
Remarks	
Pack quantity	1 pcs.