


# IG6614



## Inductive high-temperature sensor

IGA3005ZBPKG/5M/SH

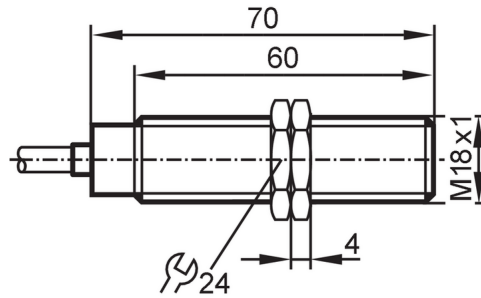

### Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	5
Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 70

### Application

Application	high-temperature applications
-------------	-------------------------------

### Electrical data

Operating voltage [V]	10...35 DC
Current consumption [mA]	< 15
Protection class	III
Reverse polarity protection	yes

### Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2
Max. leakage current [mA]	0.5
Permanent current rating of switching output DC [mA]	150
Switching frequency DC [Hz]	400
Short-circuit proof	yes
Overload protection	yes

### Monitoring range

Sensing range [mm]	5
Operating distance [mm]	0...4.1

### Accuracy / deviations

Correction factor	stainless steel: 0.6 / brass: 0.3 / aluminum: 0.2 / copper: 0.1
Hysteresis [% of Sr]	3...15
Switch-point drift [% of Sr]	-15...15

### Operating conditions

Ambient temperature [°C]	0...180
--------------------------	---------

# IG6614



## Inductive high-temperature sensor

IGA3005ZBPKG/5M/SH

Protection	IP 65
------------	-------

### Tests / approvals

EMC	EN 61000-4-2 ESD	2 kV CD / 4 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
MTTF	[years]	682

### Mechanical data

Weight	[g]	263
Housing		Threaded type
Mounting		flush mountable
Dimensions	[mm]	M18 x 1 / L = 70
Thread designation		M18 x 1
Material		threaded sleeve: stainless steel; sensing face: LCP

### Accessories

Items supplied	lock nuts: 2
----------------	--------------


### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

Cable: 5 m, silicone, Ø 5 mm; highly flexible; 3 x 0.22 mm<sup>2</sup>

### Connection

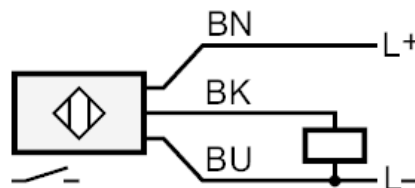

Core colors :  
BK = black  
BN = brown  
BU = blue