


MK5130



T-slot cylinder sensor

MKT3028BBPKG/G/0,5M/ZH/US

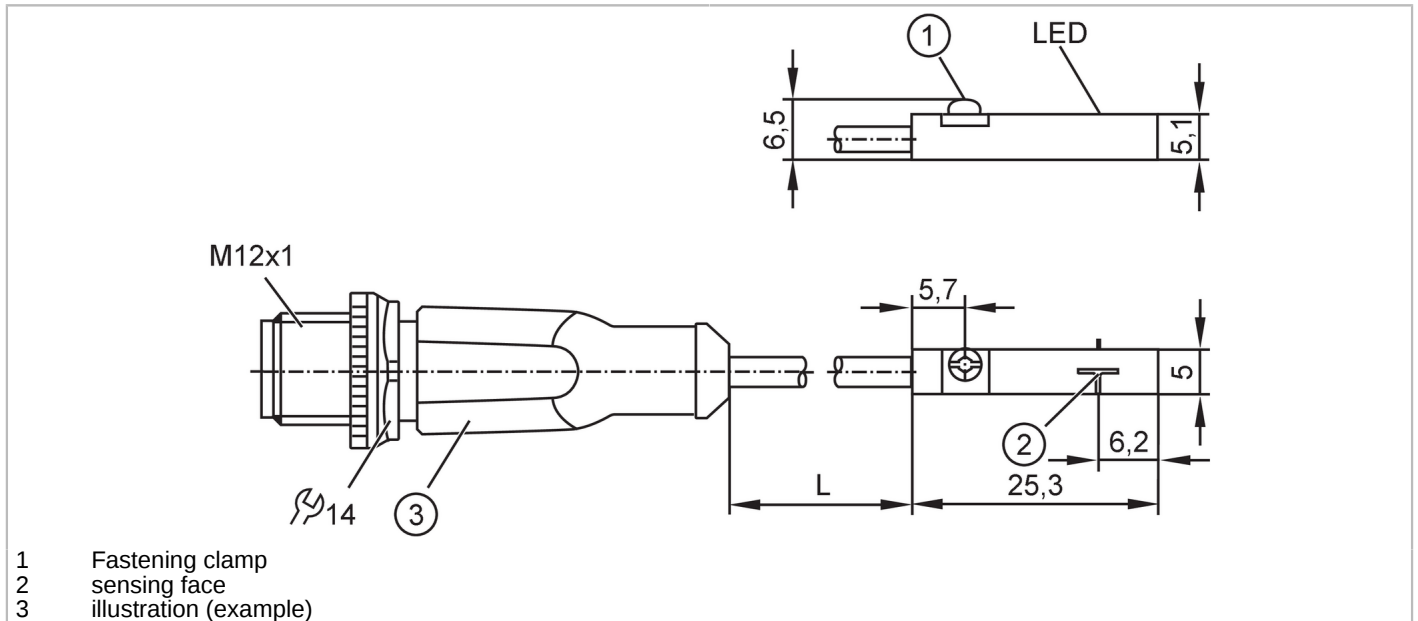

Product characteristics	
Electrical design	PNP
Output function	normally open
Dimensions [mm]	25 x 5 x 6.5
Electrical data	
Operating voltage [V]	10...30 DC; (cULus - Class 2 source required)
Current consumption [mA]	< 10
Protection class	III
Reverse polarity protection	yes
Max. power-on delay time [ms]	30
Outputs	
Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	10000
Short-circuit protection	yes
Overload protection	yes
Monitoring range	
Magnetic sensitivity [mT]	2.8
Travel speed [m/s]	> 10
Accuracy / deviations	
Hysteresis [mm]	< 1.5
Repeatability [mm]	< 0.2

MK5130



T-slot cylinder sensor

MKT3028BBPKG/G/0,5M/ZH/US

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 65; IP 67

Tests / approvals

EMC	EN 61000-4-2 ESD	- CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
MTTF	[years]	3694
UL approval	UL approval number	C003

Mechanical data

Weight	[g]	22.9
Mounting		flush mountable
Type of mounting		fastening clamp with combined slot / hexagon socket, width across flats 1.5
Cylinder type		T-slot cylinders
Dimensions	[mm]	25 x 5 x 6.5
Material		housing: PA; Fastening clamp: stainless steel

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied		rubber memory stop: 1 cable clip: 1
----------------	--	--

Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection - plug

Cable: 0.5 m, PUR

Connector: 1 x M12; coding: A; Contacts: 4; Locking: Knurled nut, rotatable



Connection

