




## Switching amplifiers for Namur sensors

NV0100/110VAC

Article no longer available - archive entry

Alternative articles: N0030A

When selecting an alternative article and accessories please note that technical data may differ!

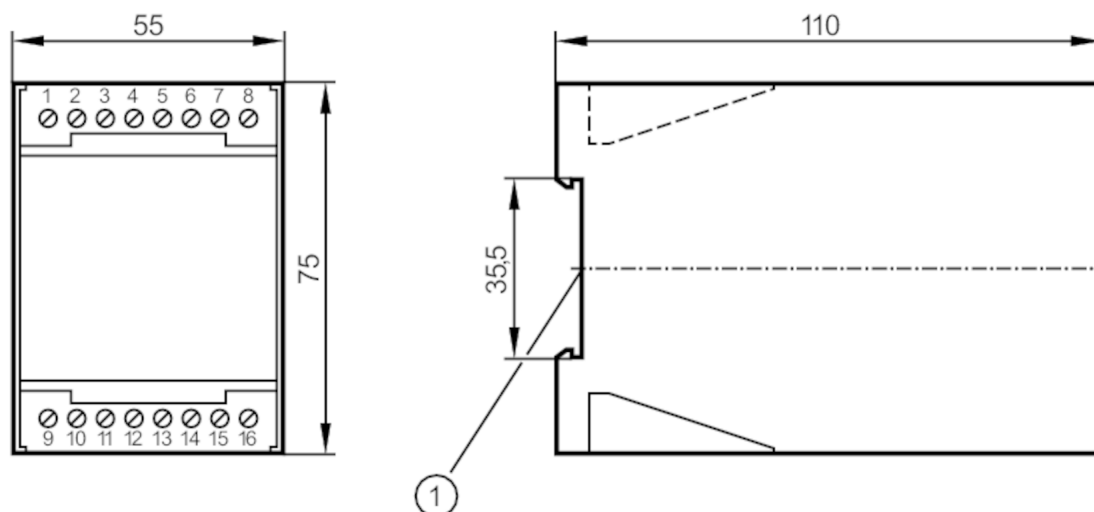

1 Mounting on DIN rail



## Application

Application

short-circuit monitoring; Wire break monitoring

## Electrical data

Operating voltage tolerance [%]

-10...10

Operating voltage [V]

&lt; 110 AC

Number of channels

1

## Outputs

Electrical design

Relay

Contact rating

4 A, 250 V AC / 500 VA

Switching frequency DC [Hz]

10

## Operating conditions

Ambient temperature [°C]

-20...60

Protection

IP 30

Protection rating terminals

IP 20

## Tests / approvals

Approval

PTB Ex-84/2066X

## Safety classification

Description

in protection rating intrinsic safety

Voltage [V]

&lt; 13,4

Current [mA]

&lt; 18,5

Power [mW]

&lt; 62

N00102



Switching amplifiers for Namur sensors

NV0100/110VAC

[Ex ia] IIC designation	[EEx ia] IIC
[Ex ia] IIB designation	[EEx ib] IIC
[Ex ia] IIC inductance	1mH / 3mH
[Ex ia] IIB inductance	90mH
[Ex ia] IIC capacitance	390nF / 345nF
[Ex ia] IIB capacitance	660nF

Mechanical data

Housing	housing for DIN rail mounting
Dimensions [mm]	75 x 55 x 110

Displays / operating elements

Display	Switching status	LED, red
	Power	LED, green


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

terminals: 16 x ...2.5 mm²

Connection

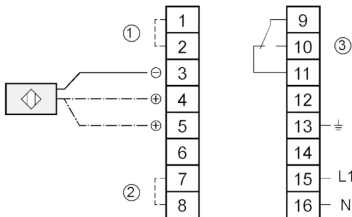

- 1: Wire break monitoring#
- 2: Output function
- 3: Relais