N00219

Switching amplifiers for Namur sensors




NV0201 230VAC,RL

Protection

Approval

Protection rating terminals

Tests / approvals

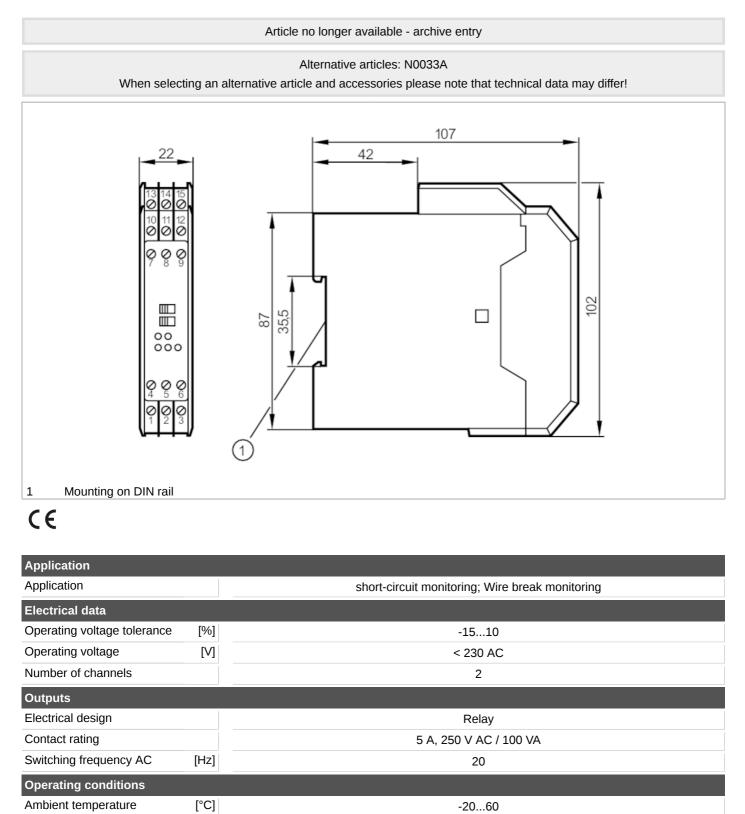

IP 30

IP 20

PTB Ex-95.C.2142X

N00219

Switching amplifiers for Namur sensors



NV0201 230VAC,RL

Safety classification				
Description		in protection rating intrinsic safety		
Voltage	[V]	< 11		
Current	[mA]	< 26		
Power	[mW]	< 72		
[Ex ia] IIC designation		[EEx ia] IIC		
[Ex ia] IIB designation		[EEx ia] IIB		
[Ex ib] IIC designation		[EEx ib] IIC		
[Ex ib] IIB designation		[EEx ib] IIB		
[Ex ia] IIC inductance		1mH / 2mH / 5mH		
[Ex ia] IIB inductance		1mH / 2mH / 5mH		
[Ex ib] IIC inductance		46mH		
[Ex ib] IIB inductance		170mH		
[Ex ia] IIC capacitance		567nF / 581nF / 483nF		
[Ex ia] IIB capacitance		2.5μF / 2.2μF / 1.8μF		
[Ex ib] IIC capacitance		2.5µF		
[Ex ib] IIB capacitance		15µF		
Mechanical data				
Housing		housing for DIN rail mounting		
Dimensions	[mm]	102 x 22 x 107		
Displays / operating ele	ements			
Display		Switching status		2 x LED, yellow
		Power		LED, green
		Function		2 x LED, red
Remarks				
Pack quantity		1 pcs.		
Electrical connection				
terminals: 15 x2.5 mm ²				
Connection				
		1 ↓ + + + + + + + + + + + + + + + + + +	7 8 9	13 14 15-N
			10 11 12 4	
1: senso 2: senso 3: Relai 4: Relai bridge	or 2 s 1 s 2	without wire-break monitorir	ıg	