




Through-beam sensor transmitter

OFS-00KG/10M

Article no longer available - archive entry

Alternative articles: OF5018

When selecting an alternative article and accessories please note that technical data may differ!

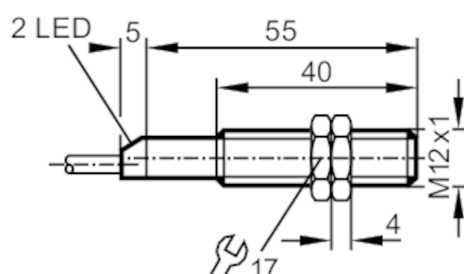

Product characteristics

Type of light	Infrared light
Housing	Threaded type

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 20
Protection class		II
Reverse polarity protection		yes
Type of light		Infrared light

Outputs

Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Transmitter / receiver	transmitter
Range [m]	< 4
Max. light spot diameter [mm]	700
Light spot dimensions refer to	at maximum range

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2
-----	--------------

Mechanical data

Weight	[g]	237
Housing		Threaded type
Dimensions	[mm]	M12 x 1 / L = 60
Thread designation		M12 x 1

OF5029



Through-beam sensor transmitter

OFS-00KG/10M

Material	brass nickel-plated
Lens material	PMMA

Displays / operating elements

Display	Power	1 x LED, green
---------	-------	----------------

Accessories

Items supplied	lock nuts: 2
----------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 10 m, PUR; 2 x 0.34 mm²

Connection

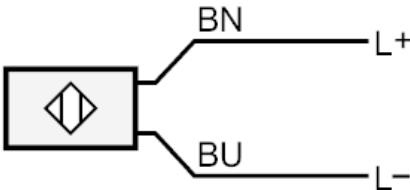

BN = Core colors :
BU = brown
blue