

# OH5020




## Through-beam sensor transmitter

OHS-00KG/0,20M/AS

Article to be discontinued

Alternative articles: O8S201

When selecting an alternative article and accessories please note that technical data may differ!

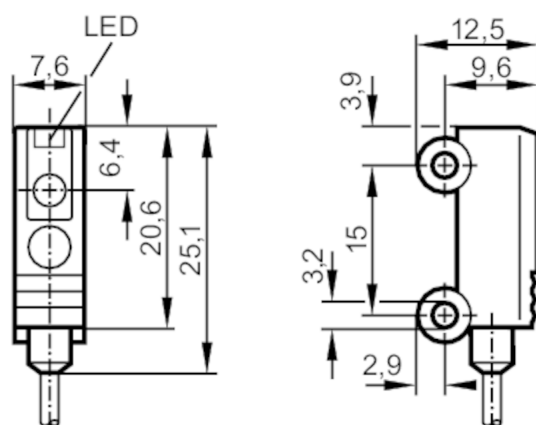

### Product characteristics

Type of light	red light
Housing	rectangular

### Application

Function principle	Through-beam sensor
--------------------	---------------------

### Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 20
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660
Typ. lifetime	[h]	75000
Reference temperature for service life	[°C]	25

### Outputs

Overload protection	yes
---------------------	-----

### Monitoring range

Transmitter / receiver	transmitter
Range [m]	< 1.2
Max. light spot diameter [mm]	10
Light spot dimensions refer to	Range

### Operating conditions

Ambient temperature	[°C]	-20...50
Protection		IP 67

# OH5020



## Through-beam sensor transmitter

OHS-00KG/0,20M/AS

### Tests / approvals

EMC	EN 60947-5-2	
-----	--------------	--

### Mechanical data

Weight	[g]	14.9
Housing		rectangular
Dimensions	[mm]	25.1 x 7.6 x 12.5
Material		ABS
Lens material		PMMA
Lens alignment		Side sensing


### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

Cable: 0.2 m, PVC

Connector: 1 x M8; coding: A



### Connection

