Through-beam sensor receiver


OJE-FPKG/FO/0,15M/US



Article to be discontinued

Alternative articles: OJ5109

When selecting an alternative article and accessories please note that technical data may differ!

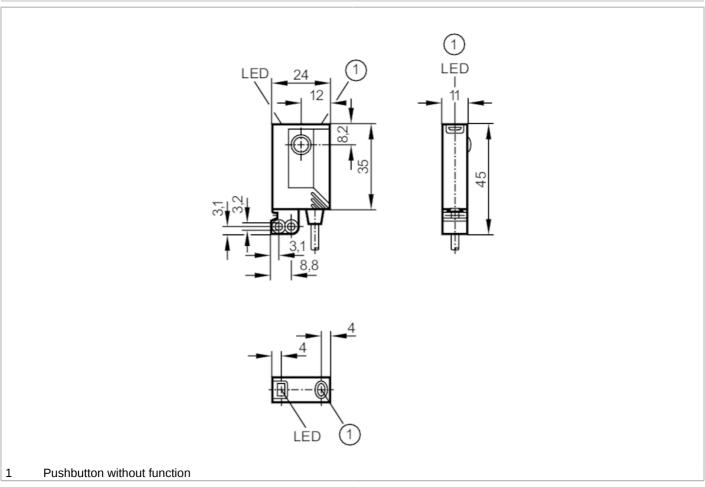



Product characteristics		
Type of light		red light
Housing		rectangular
Application		
System		gold-plated contacts
Function principle		Through-beam sensor
Electrical data		
Operating voltage	[V]	1030 DC
Current consumption	[mA]	< 12
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660

Through-beam sensor receiver





Outputs		
Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1200
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Monitoring range		
Transmitter / receiver		receiver
Range	[m]	< 10
Range adjustable		yes
Operating conditions		
Ambient temperature	[°C]	-2560
Protection		IP 67
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	968
Mechanical data		
Weight	[g]	54.8
Housing		rectangular
Dimensions	[mm]	35 x 24 x 11
Material		housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS
Lens material		glass
Lens alignment		Front sensing
Displays / operating elemen	nts	
Display		Switching status 1 x LED, yellow
		Power 1 x LED, green
Electronic lock		Function 1 x LED, red yes
Accessories		yes
Items supplied		Basic clip: 1, E20964
петіз заррііса		screws: 2 x M3 x 16
		spring washers: 2
		Nuts: 2
Remarks		
Remarks		cULus - Class 2 source required
		cULus - Class 2 source required 1 pcs.

Through-beam sensor receiver






Electrical connection

Cable: 0.15 m, PUR

Connector: 1 x M12; coding: A; Moulded body: Hytrel 8068; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated



Connection



2 Teach

Through-beam sensor receiver





Diagrams and graphs

excess gain graph

