


## Pressure sensor with display

PN-100PSBU76-QFPKG/US/ IV

Article no longer available - archive entry

Alternative articles: PN7302

When selecting an alternative article and accessories please note that technical data may differ!

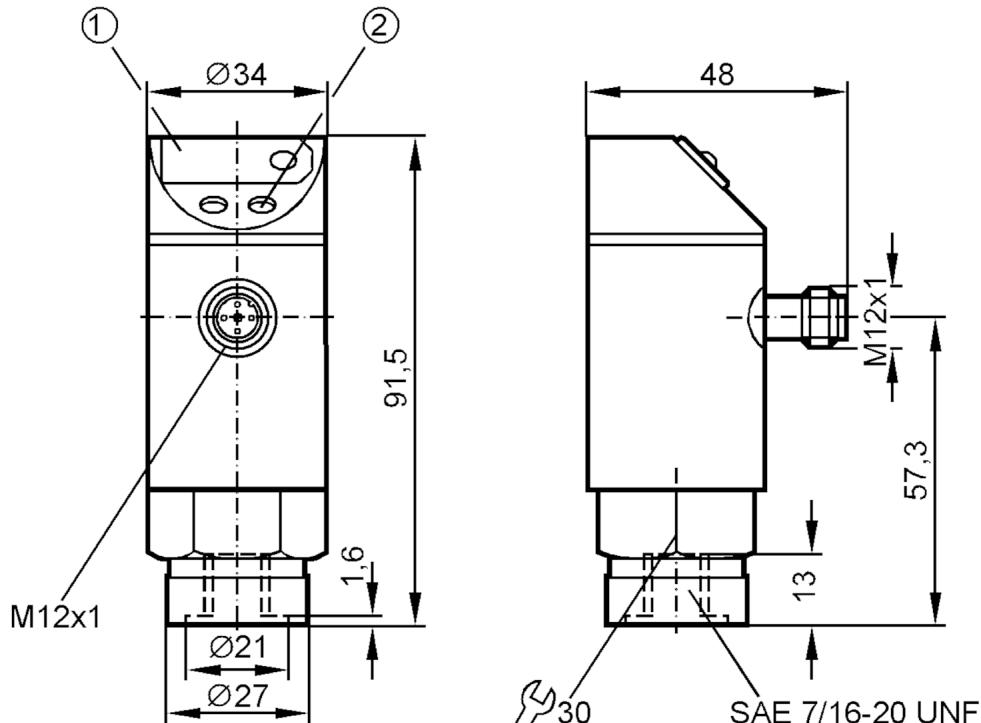

- 1 7-segment LED display  
2 Programming button



## Product characteristics

Number of inputs and outputs	Number of digital outputs: 2
Measuring range [psi]	0...1000
Process connection	threaded connection 7/16" - 20 UNF Internal thread

## Application

System	gold-plated contacts
Application	for industrial applications
Media	liquids and gases
Conditionally suitable for	For gaseous media the application is limited to max. 25 bar.
Medium temperature [°C]	-25...80
Min. bursting pressure [psi]	9000
Pressure rating [psi]	4500
Type of pressure	relative pressure

## Electrical data

Operating voltage [V]	18...30 DC
Current consumption [mA]	< 60
Min. insulation resistance [MΩ]	100; (500 V DC)
Protection class	III

# PN7322



## Pressure sensor with display

PN-100PSBU76-QFPKG/US/ /V

Reverse polarity protection		yes
Power-on delay time	[s]	0.2
Integrated watchdog		yes
<b>Inputs / outputs</b>		
Number of inputs and outputs	Number of digital outputs: 2	
<b>Outputs</b>		
Total number of outputs		2
Output signal	switching signal	
Electrical design	PNP	
Number of digital outputs		2
Output function	normally open / closed; (configurable)	
Max. voltage drop switching output DC [V]		2
Permanent current rating of switching output DC [mA]		250
Short-circuit protection		yes
Type of short-circuit protection	yes (non-latching)	
Overload protection		yes
<b>Measuring/setting range</b>		
Measuring range [psi]	0...1000	
Set point SP [psi]	10...999	
Reset point rP [psi]	5...995	
In steps of [psi]	5	
<b>Accuracy / deviations</b>		
Switch point accuracy [% of the final value]	< ± 1,0	
Repeatability [% of the final value]	< ± 0,25; (with temperature fluctuations < 10 K)	
Temperature drift per 10 K	< ± 0,3	
<b>Reaction times</b>		
Switching frequency for a given set response time of one output	Response time (dAP) [ms]	3 6 10 17 30 60 125 250 500
	Switching frequency [Hz]	170 80 50 30 16 8 4 2 1
Response time [ms]	at rectangular pressure characteristic; Set point (SPx) = 70 %; Reset point (rPx) = 30 %	
Delay time programmable dS, dr [s]	0, 0,2,...10, 11,...50	
<b>Software / programming</b>		
Adjustment of the switch point	Programming button	
Parameter setting options	hysteresis / window; normally open / closed; switch-on/switch-off delay; Damping	
<b>Operating conditions</b>		
Ambient temperature [°C]	-25...80	
Storage temperature [°C]	-40...100	

# PN7322



## Pressure sensor with display

PN-100PSBU76-QFPKG/US /V

Protection

IP 67

### Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)

### Mechanical data

Material	EPDM/X; FKM; PA; PBT; PC; stainless steel (1.4301 / 304)
Materials (wetted parts)	stainless steel (1.4305 / 303); ceramics; FKM
Min. pressure cycles	100 million
Process connection	threaded connection 7/16" - 20 UNF Internal thread

### Displays / operating elements

Display	Switching status	2 x LED, red
	Function display	7-segment LED display
	Measured values	7-segment LED display

### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



### Connection

