
RN6040

Absolute singleturn encoder with solid shaft




RN-0256-G24/L6A



Alternative articles: RN6012

When selecting an alternative article and accessories please note that technical data may differ!

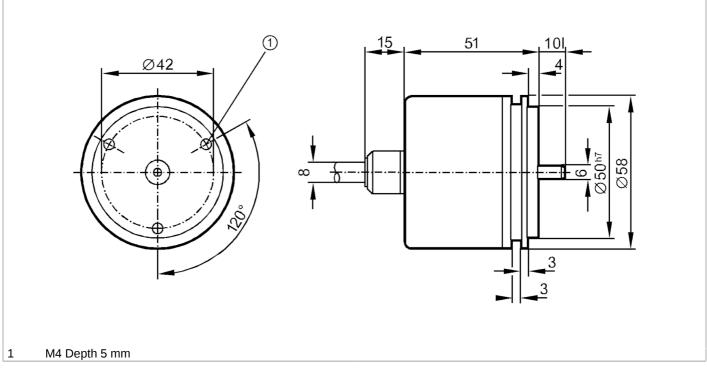

(€ °£1, n°

Product characteristics	
Resolution	256 resolution
Communication interface	parallel
Shaft design	solid shaft
Shaft diameter [mm]	6
Electrical data	
Operating voltage [V]	1030 DC
Current consumption [mA]	< 150
Max. revolution electrical [U/min]	6000
Outputs	
Electrical design	HTL
Max. current load per output [mA]	20
Type of short-circuit protection	< 60 s
Code	Gray code; (increasing code values when turned clockwise (seen on the shaft))
Measuring/setting range	
Resolution	256 resolution
Interfaces	
Communication interface	parallel

RN6040

Absolute singleturn encoder with solid shaft



RN-0256-G24/L6A

Operating conditions			
Ambient temperature	[°C]	-2070	
Storage temperature	[°C]	-30100	
Max. relative air humidity	[%]	98	
Protection		IP 65	
Tests / approvals			
Shock resistance		100 g (6 ms)	
Vibration resistance		10 g (552000 Hz)	
		10 g (552000 HZ)	
Mechanical data	[]		
Dimensions	[mm]	Ø 58 / L = 76	
Material		aluminum	
Max. revolution, mechanical [U/min]	10000	
Max. starting torque	[Nm]	1	
Reference temperature torque	[°C]	20	
Shaft design		solid shaft	
Shaft diameter	[mm]	6	
Shaft material		steel (1.4104)	
Max. shaft load axial (at the shaft end)	[N]	10	
Max. shaft load radial (at the shaft end)	[N]	20	
Electrical connection			
Cable: 6 m, PUR; Maximum cable length: 100 m; axial			
brown 1030V			
yellow/brown 1030V sensor			
white OV			
white/yellow OV sensor			
green release A inverted 530V			
yellow release B inverted 530V white/grey bit 8 (MSB) inverted			
brown/green bit 8 (MSB)			
	bit 6		
rey/pink bit 5			
ilac bit 4			
black bit 3			
red bit 2			
blue bit 1			
screen housing			

RN6040

Absolute singleturn encoder with solid shaft

RN-0256-G24/L6A



Diagrams and graphs

Pulse diagram

Image: state of the state of