


## Incremental encoder with solid shaft

RV-1000-I24/L6

Article to be discontinued

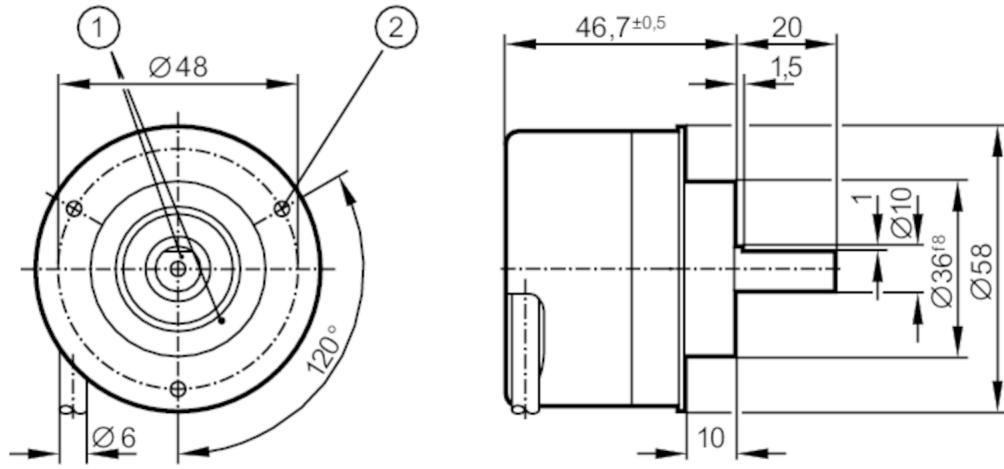

- 1 reference mark  
2 M3 Depth 5 mm



### Product characteristics

Resolution	1000 resolution
Shaft design	solid shaft
Shaft diameter [mm]	10

### Application

Function principle	incremental
--------------------	-------------

### Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 150

### Outputs

Electrical design	HTL
Max. current load per output [mA]	50
Switching frequency [kHz]	300
Type of short-circuit protection	< 60 s
Phase difference A und B [°]	90

### Measuring/setting range

Resolution	1000 resolution
------------	-----------------

### Operating conditions


Ambient temperature [°C]	-40...100
Note on ambient temperature	firmly laid cable: -40 °C
Max. relative air humidity [%]	98
Protection	IP 64; (on the housing: IP 67; on the shaft: IP 64)

# RV6138



## Incremental encoder with solid shaft

RV-1000-I24/L6

Tests / approvals		
Shock resistance		200 g
Vibration resistance		30 g
MTTF	[years]	190
Mechanical data		
Weight	[g]	729.4
Dimensions	[mm]	Ø 58 / L = 46.7
Material		aluminum
Max. revolution, mechanical [U/min]		12000
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	10
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end)	[N]	10
Max. shaft load radial (at the shaft end)	[N]	20
Electrical connection		
Cable: 6 m, PUR; Maximum cable length: 300 m; radial, can also be used axially		
brown	A	
green	A inverted	
grey	B	
pink	B inverted	
red	0 index	
black	0 index inverted	
blue	L+ sensor	
white	0V sensor	
brown/green	L+ (Up)	
white/green	0V (Un)	
lilac	error inverted	
screen	housing	
Diagrams and graphs		
Pulse diagram		
		Direction of rotation clockwise (looking at the shaft)