

SF223A




Flow sensor for connection to an evaluation unit

SFR14XBK/2G /6M

Article to be discontinued

Alternative articles: SF323A

When selecting an alternative article and accessories please note that technical data may differ!

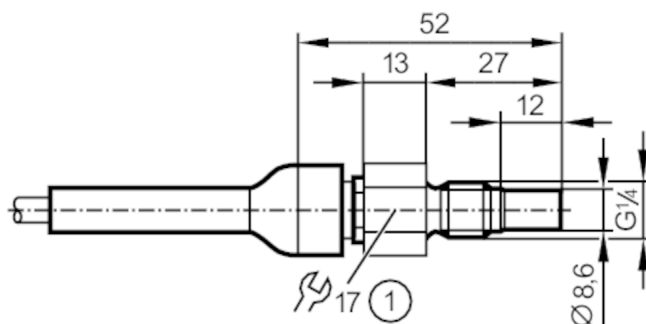

1 tightening torque max. 8 Nm



Product characteristics

Probe length L	[mm]	12
Process connection		G 1/4 external thread

Application

Media		Liquids; aggressive media
Medium temperature	[°C]	5...70
Pressure rating	[bar]	30

Liquids

Medium temperature	[°C]	5...70
--------------------	------	--------

Electrical data

Connection to control monitor		VS2000 Exi (PTB 01 ATEX 2075)
-------------------------------	--	-------------------------------

Measuring/setting range

Probe length L	[mm]	12
Liquids		
Setting range	[cm/s]	3...60
Greatest sensitivity	[cm/s]	3...40

Accuracy / deviations

Max. temperature gradient of medium	[K/min]	7
-------------------------------------	---------	---

Reaction times

Response time	[s]	2...20
---------------	-----	--------

Liquids

Response time	[s]	2...20
---------------	-----	--------

Operating conditions


Ambient temperature	[°C]	-20...70
Protection		IP 67

SF223A



Flow sensor for connection to an evaluation unit


SFR14XBK/2G /6M

Tests / approvals		
Approval	DMT 03 ATEX E091; IECEX BVS 06.0007	
ATEX marking	 II 2G Ex ia IIC T4 Gb	
Shock resistance	DIN IEC 68-2-27	40 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	10 g (55...2000 Hz)
MTTF [years]	8648	

Mechanical data		
Weight [g]	341.8	
Housing	Threaded type	
Material	ceramics (99.7 % Al ₂ O ₃)	
Materials (wetted parts)	ceramics (99.7 % Al ₂ O ₃)	
Process connection	G 1/4 external thread	
Installation length EL [mm]	27	

Remarks		
Remarks	In principle, the type test according to 94/9/EC (ATEX) only takes atmospheric conditions into account (0.8...1.1 bar).	
	For pressures outside this range use must be assessed and approved by the user.	
	Adhere to the operating instructions and the type test certificate.	
Pack quantity	1 pcs.	

Electrical connection		
Cable: 6 m, TPE-S; Maximum cable length: 100 m; 5 x 0.34 mm ²		
Connection		

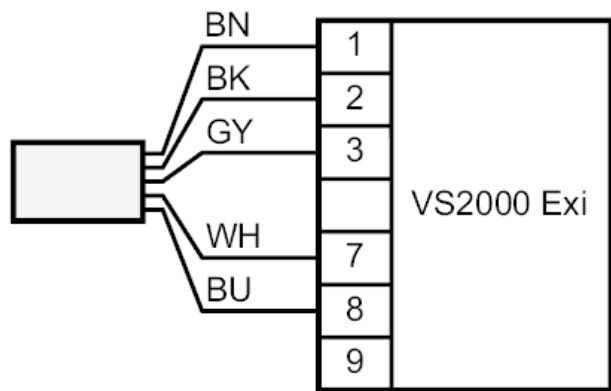

Core colors :	
BN =	brown
BU =	blue
BK =	black
WH =	white
GY =	grey