


# TM5331



## Temperature sensor with process connection

TM-100KCBN12- /US/

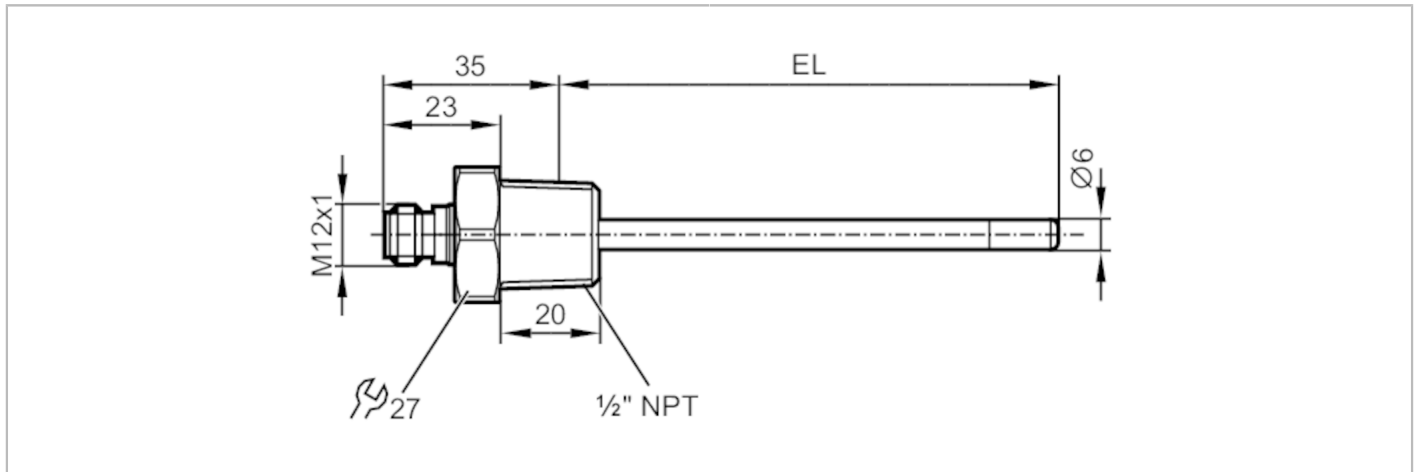

Product characteristics		
Measuring range	-40...150 °C	-40...302 °F
Process connection	threaded connection 1/2" NPT external thread	
Installation length EL	[mm]	100
Application		
Special feature	gold-plated contacts	
Measuring element	1 x Pt 1000; (to DIN EN 60751, class A)	
Media	liquids and gases	
Pressure rating	[bar]	160
Minimum installation depth	[mm]	15
Electrical data		
Protection class	III	
Measuring/setting range		
Probe length L	[mm]	92
Measuring range	-40...150 °C	-40...302 °F
Accuracy / deviations		
Accuracy	[K]	± (0,15 K + 0,002 x t )
Reaction times		
Dynamic response T05 / T09	[s]	1 / 3; (according to DIN EN 60751)
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection	IP 68; IP 69K	
Tests / approvals		
Shock resistance	DIN EN 60068-2-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF	[years]	22831
UL approval	UL approval number	K004

# TM5331



## Temperature sensor with process connection

TM-100KCBN12- /US/

Mechanical data	
Weight [g]	144.5
Housing	tubular
Dimensions [mm]	Ø 30 / L = 135
Material	stainless steel (1.4404 / 316L)
Materials (wetted parts)	stainless steel (1.4404 / 316L)
Process connection	threaded connection 1/2" NPT external thread
Probe diameter [mm]	6
Installation length EL [mm]	100

Remarks	
Remarks	cULus - Class 2 source required The values for accuracy apply to flowing water.
Pack quantity	1 pcs.

### Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



### Connection

