
ZZ0057

Weld water cooling water flow loops

KWST WITH BALANCING VALVES





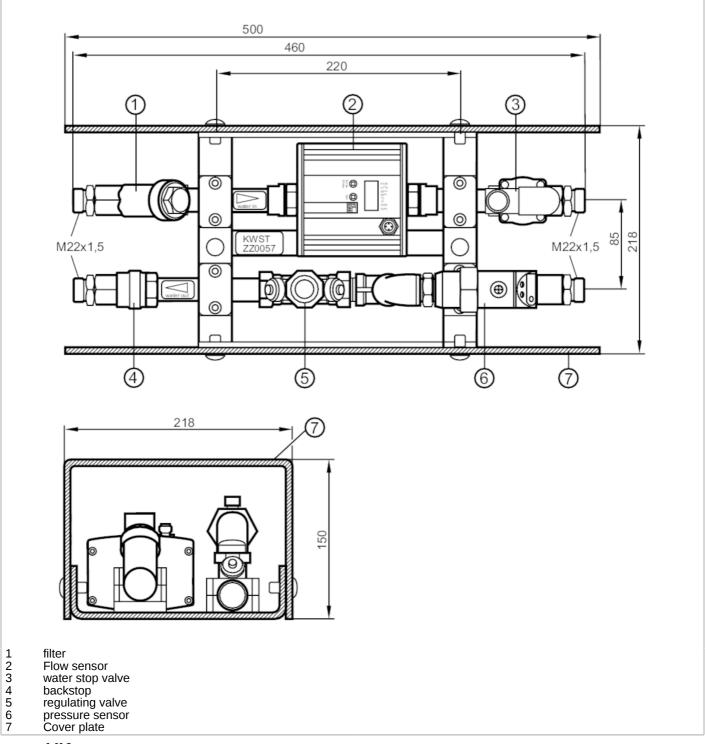

Product characteristics	
Process connection for welding gun	
Process connection	M22 x 1,5
Process connection for water supply	
Process connection	M22 x 1,5

ZZ0057

Weld water cooling water flow loops





Flow monitoring Measuring range	[l/min]	0.50
	[1/111111]	050
Application		
System		gold-plated contacts
Application		Industrial applications; Cooling water control
Installation		connection to pipe by means of an adapter; tube connection
Measuring parameters		flow; temperature; pressure; totalizer
Control		manual
Media		water; glycol solutions
Medium temperature	[°C]	-1080
Pressure rating	[bar]	10
Components		SU ultrasonic flowmeters for water and oil based media, SU7200
		Electronic pressure monitor, PN7594
		filter
		water stop valve
		regulating valve
		backstop
		Cover plate
Outputs		
Output signal		switching signal
Output function		normally open / closed; (configurable)
Measuring/setting range	9	
Pressure monitoring		
Measuring range	[bar]	010
Flow monitoring		
Measuring range	[l/min]	050
Temperature monitoring		
Measuring range	[°C]	-1080
Operating conditions		
Ambient temperature	[°C]	-1050
Storage temperature	[°C]	-2580
Protection		IP 65; (sensors)
Tests / approvals		
EMC		DIN EN 61000-6-2
		DIN EN 61000-6-3
Pressure equipment direct	tive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request
Mechanical data		
Weight	[g]	7781.2
Type of mounting		mounting bracket with protective cover
Material		stainless steel (1.4404 / 316L); PBT-GF20; PC; FKM; PBT +PC-GF30; bronze (2.1096.01); AlMgSi0,5 anodized; PA
Materials (wetted parts)		stainless steel (1.4404 / 316L); FKM; PES; NBR; PVDF; Centellen 200; ceramics
Process connection for we	eldina aun	
Process connection	c.a.i.g gair	M22 x 1,5
		IVIZZ X 1,U

ZZ0057

Weld water cooling water flow loops



KWST WITH BALANCING VALVES

Process connection for water supply	/	
Process connection	M22 x 1,5	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Connector: 3 x M12; Contacts: gold-plated		