

SR0104




Control monitor for flow sensors

VS0200/ 24VDC

Article no longer available - archive entry

Alternative articles: SR0150

When selecting an alternative article and accessories please note that technical data may differ!

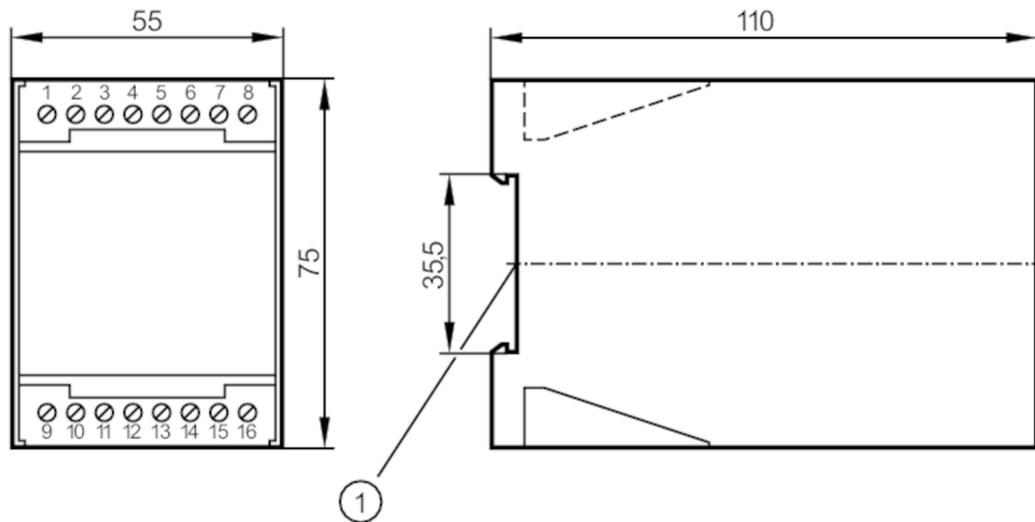

1 mounting on DIN rail



Application

Application Flow monitoring; Wire monitoring

Electrical data

Operating voltage tolerance [%]	-10...10
Operating voltage [V]	24 DC
Current consumption [mA]	70
Power-on delay time [s]	30
Number of channels	1

Outputs

Electrical design	relay
Contact rating	4 A, 250 V AC
Switching function flow monitoring	relay energised when flow is present
Switching function wire break monitoring	relay de-energised in case of wire break and short circuit

Response times

Response time [s]	< 10
-------------------	------

Software / programming

Adjustment of the switch point	potentiometer
Selection liquids / gases	slide switch


SR0104



Control monitor for flow sensors

VS0200/ 24VDC

Operating conditions		
Ambient temperature	[°C]	0...60
Protection		IP 40
Protection rating terminals		IP 20
Mechanical data		
Housing		housing for DIN rail mounting
Dimensions	[mm]	75 x 55 x 110
Materials		plastics
Displays / operating elements		
Display	function	11 x LED
	switching status	LED, red
Remarks		
Pack quantity		1 pcs.
Electrical connection		
terminals: 16 x ...2.5 mm ²		
Connection		

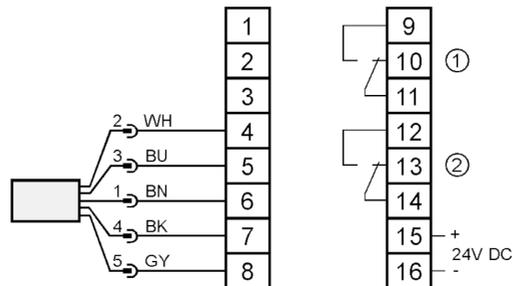

- 1: Relais Wire monitoring
 2: Relais Flow monitoring
 Core colours :
 BN = brown
 BU = blue
 BK = black
 WH = white
 GY = grey