




AS-Interface ClassicLine module with quick mounting technology

ClassicLine 1AI C 1AO C 2DI

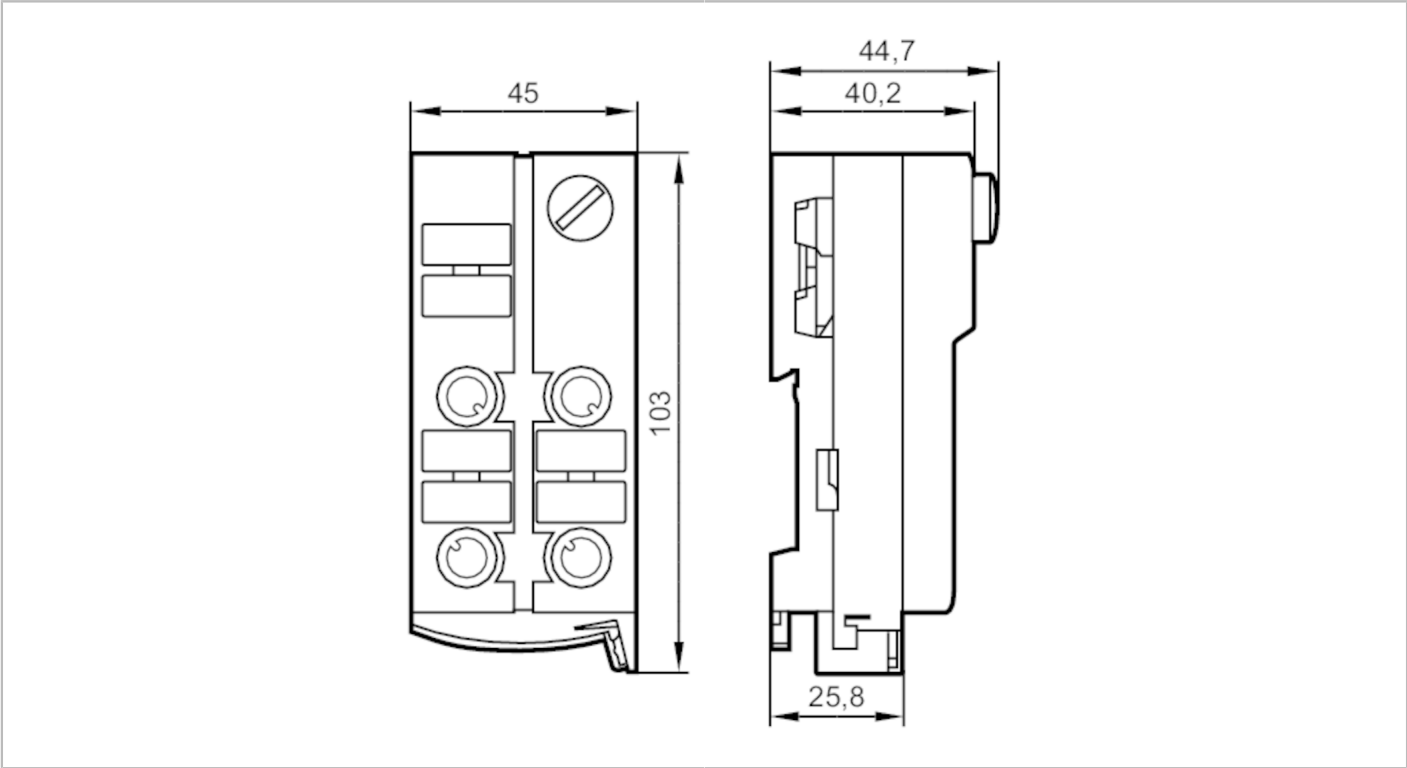

Product characteristics		
Number of inputs and outputs	Number of digital inputs: 2; Number of analogue inputs: 1; Number of analogue outputs: 1	
Application		
Design	only for operation with AS-i masters with the profile M4	
Application	field installation	
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	250
Reverse polarity protection		yes
Max. current load total	[A]	0.2
Inputs / outputs		
Number of inputs and outputs	Number of digital inputs: 2; Number of analogue inputs: 1; Number of analogue outputs: 1	
Inputs		
Number of digital inputs		2
Input circuit of digital inputs		PNP
Sensor supply of the inputs		AS-i
Power supply	[V]	18...30; (DC)
Number of analogue inputs		1; (connection of 2-wire, 3-wire and 4-wire sensors)
Analogue input (current)	[mA]	4...20
Max. voltage drop across load for nominal voltage	[V]	10



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 1AI C 1AO C 2DI

Analogue inputs protected against short circuits	yes
Resolution of analogue input	12 bit

Outputs

Number of analogue outputs	1; (connection of 2-wire, 3-wire and 4-wire actuators)
Analogue current output [mA]	4...20
Max. voltage drop across load for nominal current [V]	10
Resolution of analogue output	12 bit
Actuator supply outputs	AS-i

Accuracy / deviations

Measuring error [% of the final value]	0,5
--	-----

Operating conditions

Ambient temperature [°C]	-25...70
Storage temperature [°C]	-25...70
Max. relative air humidity [%]	90; (non condensing)
Max. height above sea level [m]	2000
Protection	IP 67

Tests / approvals

EMC	EN 50295	
	IEC 61000-6-2	
MTTF [years]	137	
UL approval	power supply	Class 2

AS-i classification

AS-i version	3.0
Extended addressing mode	no
AS-i master profile	M4
AS-i profile	S-7.5.5
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	5.5

Mechanical data

Weight [g]	162.6
Materials	PA; piercing contacts: CuSn6 nickel-plated and tin-plated

Displays / operating elements

Display	analogue signal	LED, yellow channels AI1, AO1
	switching status	LED, yellow channels I1...I2
	operation	LED, green AS-i
	errors	LED, red

Electrical connection

Module connection	Flat cables
-------------------	-------------

Accessories

Items supplied	lower part
Accessories (optional)	Protective cap: M12, E73004



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 1AI C 1AO C 2DI


Remarks	
Remarks	3-wire connection possible via external link.
	The actuator supply on pins 1 and 3 can be used to supply the sensors / actuators.
	In this case, an electrical isolation to AS-i is not given.
	The analogue inputs and outputs (pins 2 and 4) are electrically separated and have no connection to AS-i.
	Do not connect any of the following points to an external potential:
	I-1/2, I-2, Pin 1, Pin 3
	The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.

Electrical connection

; Maximum cable length: 30 m
quick mounting technology for AS-i flat cable: ; three orientations possible

Electrical connection - analogue

Connector: M12; coding: A; Maximum cable length: 30 m



	analogue input
1	Sensor supply + 24 V
2	analogue input AI +
3	Sensor supply 0 V
4	analogue input AI -
5	functional earth
	analogue output
1	actuator supply + 24 V
2	analogue output AO +
3	actuator supply 0 V
4	analogue output AO -
5	functional earth




AS-Interface ClassicLine module with quick mounting technology


ClassicLine 1AI C 1AO C 2DI

Electrical connection - digital

Connection

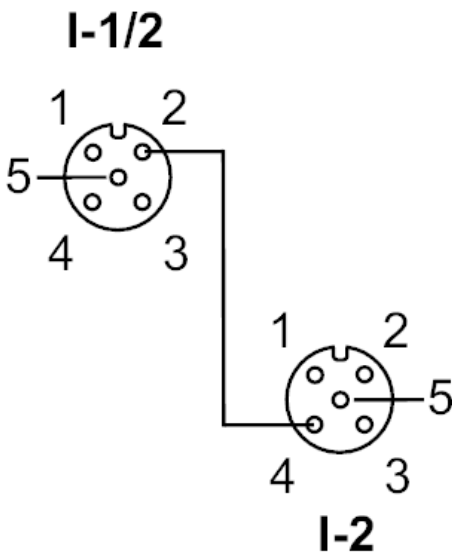

Connector: M12; coding: A; Maximum cable length: 30 m



	input
	socket I-1/2
1	Sensor supply L+
2	data input 2
3	Sensor supply L-
4	data input 1
5	functional earth FE
	socket I-2
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	data input 2
5	functional earth FE