


E80391



RFID antenna adapter to increase the ranges

ANT-AMP/136x76/KQ

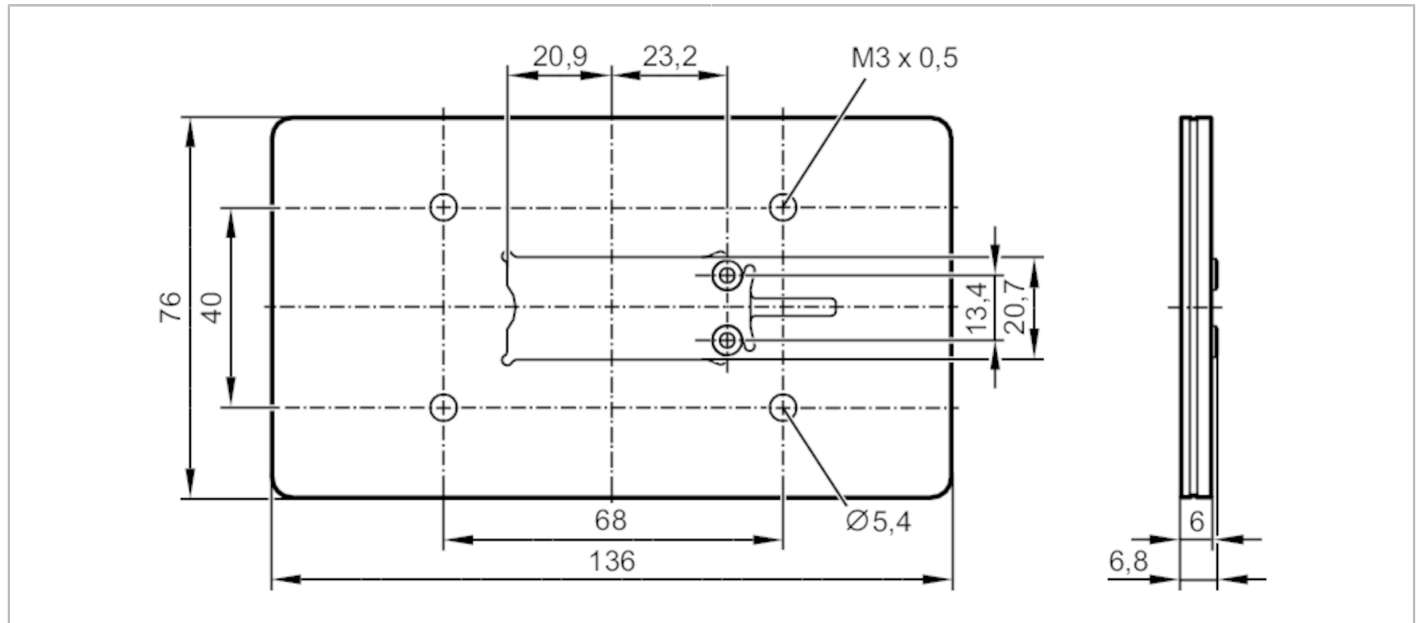

Electrical data			
Operating frequency	[MHz]		13,56
Operating conditions			
Ambient temperature	[°C]		-20...60
Storage temperature	[°C]		-20...60
Mechanical data			
Weight	[g]		110
Materials			PVC
Tightening torque	[Nm]		0.5
Remarks			
Pack quantity			1 pcs.
Other data			

Tag E80371 (30 mm)

antenna	range without metal			
ANT515 / ANT516 + E80391	40 mm			

Tag E80384 (50 mm)

antenna	range without metal			
ANT515 / ANT516 + E80391	70 mm			

E80391



RFID antenna adapter to increase the ranges

ANT-AMP/136x76/KQ

Tag E80320 (ISO card)

antenna	range without metal			
ANT515 / ANT516 + E80391	80 mm			