


OPL-FNKG/IO-LINK/AS



Output function	light-on/dark-on mode; (selectable)
-----------------	-------------------------------------



Photoelectric angle sensor

OPL-FNKG/IO-LINK/AS

Max. voltage drop switching output DC	[V]	1
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	5000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Diameter of the smallest detectable object	[mm]	0.3
--	------	-----

Interfaces

Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles		Smart Sensor: Device Identification; Device Diagnosis; Teach Channel; Switching Channel; Process Data Variable
SIO mode		yes
Required master port type		A
Min. process cycle time	[ms]	3.2
Supported DeviceIDs	Type of operation	DeviceID
	default	1103

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 67

Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	709

Mechanical data

Weight	[g]	182
Dimensions	[mm]	105 x 10 x 105
Side length X	[mm]	80
Side length Y	[mm]	80
Sensor width Z	[mm]	100
Materials		housing: diecast zinc black anodised; lens: glass

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Remarks

Remarks		operating voltage "supply class 2" according to cULus
Pack quantity		1 pcs.

Photoelectric angle sensor


OPL-FNKG/IO-LINK/AS

Electrical connection

Connector: 1 x M8; coding: A



Connection

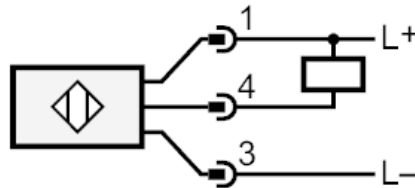

4

OUT / IO-Link