


DP3603



Adaptor relai

RELAIS ADAPTER/2xNO/IP69K

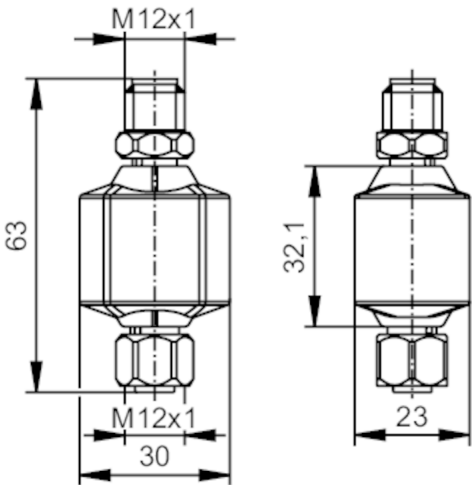

Karakteristik produk		
Fungsi output		biasanya terbuka
Dimensi	[mm]	63 x 30 x 23
Data kelistrikan		
Tegangan pengoperasian	[V]	18...30 DC; ((di lingkungan basah: 18...28 V) ; sesuai SELV/PELV)
Tegangan nominal DC	[V]	24
Konsumsi arus	[mA]	< 10
Input/output		
Jumlah input dan output		Jumlah input digital: 2; Jumlah output relai: 2
Input		
Jumlah input digital		2; (tipe 3 (IEC 61131-2))
Output		
Rentang tegangan DC	[V]	0...32; (sesuai SELV/PELV)
Rentang tegangan AC	[V]	0...20; ((di lingkungan basah: 0...16 V); sesuai SELV/PELV)
Fungsi output		biasanya terbuka
Beban arus maks. per output	[mA]	1000; (soket pin 1: 2000 mA)
Jumlah output relai		2
Frekuensi peralihan AC	[Hz]	1
Frekuensi peralihan DC	[Hz]	1
Catatan tentang frekuensi peralihan	[Hz]	tidak ada beban kapasitif
Kondisi pengoperasian		
Suhu sekitar	[°C]	-25...60
Catatan tentang suhu sekitar		2000 m: -25...60 °C
		3000 m: -25...55 °C
		4000 m: -25...52 °C
Suhu penyimpanan	[°C]	-25...70
Kelembapan udara relatif maks.	[%]	90; (penurunan linear hingga 50% (40 °C) non kondensasi)



Adaptor relai

RELAIS ADAPTER/2xNO/IP69K

Ketinggian maks. di atas permukaan laut [m]	4000
Perlindungan	IP 67; IP 69K
Tingkat kekotoran	2; (sebelum pemasangan dan ketika perangkat diganti)

Pengujian/persetujuan

MTTF [ANN]	942
------------	-----

Data teknis

Berat [g]	75.1
Berat (tanpa aksesoris dan kemasan) [g]	35
Dimensi [mm]	63 x 30 x 23
Material	casing: PA; selongsong berulir: baja tahan karat (1.4404 / 316L)
Material penyegel	FKM

Keterangan

Keterangan	Untuk informasi lebih lanjut, lihat petunjuk pengoperasian.
Jumlah paket	1 buah

Koneksi listrik - colokan


Konektor: 1 x M12, lurus; pengkodean: A; Segel: FKM



- 1: L+
 2: IN1 DI
 3: L-
 4: IN2 DI

Koneksi listrik - soket

Konektor: 1 x M12, lurus; pengkodean: A; Segel: FKM



- 1: L1 / L+ (AC/DC)
 2: OUT1 NO
 3: n.c.
 4: OUT2 NO
 5: n.c.