

# RU1033




## Incremental encoder with solid shaft

RU-2000-I05/L2

phase-out article

Alternative articles: RUP500 + E12402

When selecting an alternative article and accessories please note that technical data may differ!

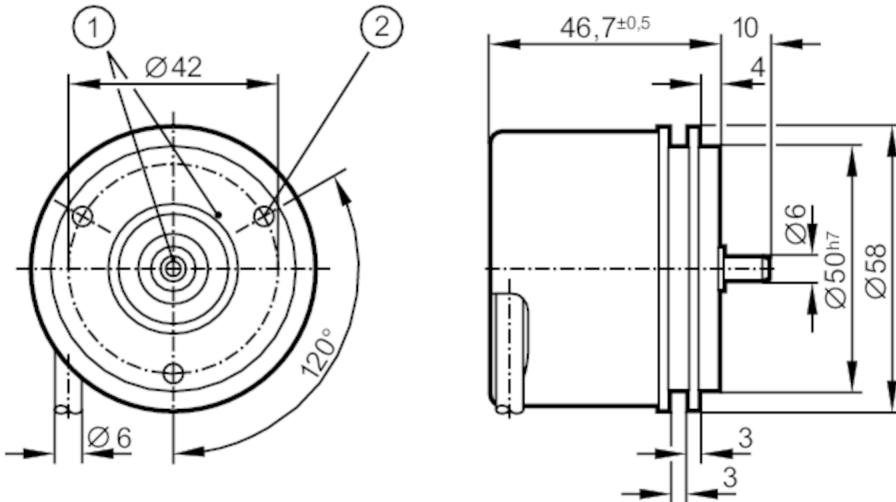

- 1 reference mark  
2 M4 Depth 5 mm



### Product characteristics

Resolution	2000 resolution
Shaft design	solid shaft
Shaft diameter [mm]	6

### Application

Function principle	incremental
--------------------	-------------

### Electrical data

Operating voltage tolerance [%]	10
Operating voltage [V]	5 DC
Current consumption [mA]	< 120

### Outputs

Electrical design	TTL
Max. current load per output [mA]	20
Switching frequency [kHz]	300
Phase difference A and B [°]	90

### Measuring/setting range

Resolution	2000 resolution
------------	-----------------

### Operating conditions

Ambient temperature [°C]	-40...100
Note on ambient temperature	for firmly laid cable: -40 °C

# RU1033



## Incremental encoder with solid shaft

RU-2000-I05/L2

Max. relative air humidity	[%]	98
Protection		IP 64; (on the housing: IP 67; on the shaft: IP 64)
<b>Tests / approvals</b>		
Shock resistance		200 g
Vibration resistance		30 g
MTTF	[years]	190
<b>Mechanical data</b>		
Weight	[g]	492
Dimensions	[mm]	Ø 58 / L = 46.7
Materials		aluminium
Max. revolution, mechanical	[U/min]	16000
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	6
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end)	[N]	10
Max. shaft load radial (at the shaft end)	[N]	20
Fixing flange		synchro-flange
<b>Electrical connection</b>		
Cable: 2 m, PUR; Maximum cable length: 100 m; radial, can also be used axially		
brown		A
green		A inverted
grey		B
pink		B inverted
red		0 index
black		0 index inverted
blue		L+ sensor
white		0V sensor
brown/green		L+ (Up)
white/green		0V (Un)
lilac		failure inverted
screen		housing
<b>Diagrams and graphs</b>		
Pulse diagram		
		direction of rotation clockwise (looking at the shaft)