

DX2002




Multifunction display for monitoring revolution, speed and time

DISPLAY/FX360/ANALOG OUT

Article no longer available - archive entry

Alternative articles: DX2022

When selecting an alternative article and accessories please note that technical data may differ!

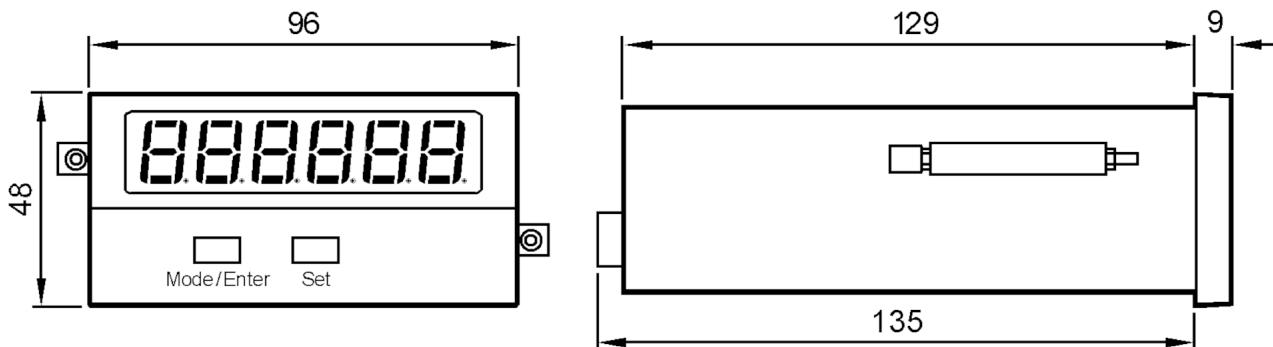

CE

Application

Application	universal evaluation and display for all physical units which can be derived from pulse sequences
-------------	---

Electrical data

Frequency AC	[Hz]	50...60
Operating voltage tolerance	[%]	33...58
Operating voltage	[V]	230 / 115 AC / 24 DC
Current consumption	[mA]	120 (18 V); 95 (24 V); 80 (30 V)
Auxiliary energy for sensors DC	[V]	24; ($\pm 15\%$, 150 mA)

Inputs / outputs

Number of inputs and outputs	Number of analogue outputs: 1
------------------------------	-------------------------------

Outputs

Number of analogue outputs	1
Analogue current output	[mA]
Analogue voltage output	[V]

Operating conditions

Ambient temperature	[°C]	0...45
Storage temperature	[°C]	-25...75

DX2002



Multifunction display for monitoring revolution, speed and time

DISPLAY/FX360/ANALOG OUT

Protection

IP 65; (on the front)

Protection rating terminals

IP 20

Tests / approvals

EMC

EN 50081-1

EN 61000-6-2

Mechanical data

Weight

[g]

580.8

Materials

Noryl UL94-V-0

Displays / operating elements

Display

7-segment LED display, orange 6-digit 15 mm

Electrical connection

screw terminals, DC: 10 x ...1.5 mm²

screw terminals, AC: 4 x ...2.5 mm²

Connection

