

N05204




Switching amplifiers for Namur sensors

NV0201 20-30VDC,RL

Article no longer available - archive entry

Alternative articles: N0533A

When selecting an alternative article and accessories please note that technical data may differ!

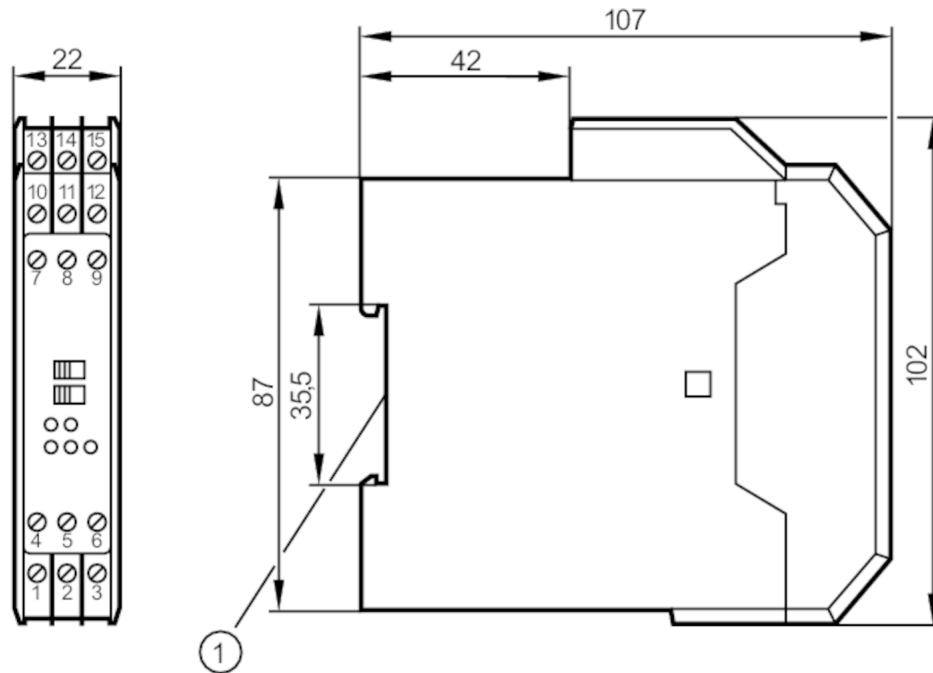

1 mounting on DIN rail



Application

Application short-circuit monitoring; Wire monitoring

Electrical data

Operating voltage tolerance [%]	-15...20
Operating voltage [V]	20...30 DC
Number of channels	2

Outputs

Electrical design	relay
Contact rating	5 A, 250 V AC / 100 VA
Switching frequency DC [Hz]	20

Operating conditions

Ambient temperature [°C]	-20...60
Protection	IP 30
Protection rating terminals	IP 20

Tests / approvals

Approval	PTB Ex-95.C.2142X
----------	-------------------



Switching amplifiers for Namur sensors

NV0201 20-30VDC,RL

Safety classification

Designation	in protection rating intrinsic safety	
Voltage [V]		< 11
Current [mA]		< 26
Power [mW]		< 72
[Ex ia] IIC designation		[EEx ia] IIC
[Ex ia] IIB designation		[EEx ia] IIB
[Ex ib] IIC designation		[EEx ib] IIC
[Ex ib] IIB designation		[EEx ib] IIB
[Ex ia] IIC inductance		1mH / 2mH / 5mH
[Ex ia] IIB inductance		1mH / 2mH / 5mH
[Ex ib] IIC inductance		46mH
[Ex ib] IIB inductance		170mH
[Ex ia] IIC capacitance		567nF / 581nF / 483nF
[Ex ia] IIB capacitance		2.5µF / 2.2µF / 1.8µF
[Ex ib] IIC capacitance		2.5µF
[Ex ib] IIB capacitance		15µF

Mechanical data

Housing	housing for DIN rail mounting	
Dimensions [mm]	102 x 22 x 107	

Displays / operating elements

Display	switching status	2 x LED, yellow
	operation	LED, green
	function	2 x LED, red


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

terminals: 15 x ...2.5 mm²

Connection

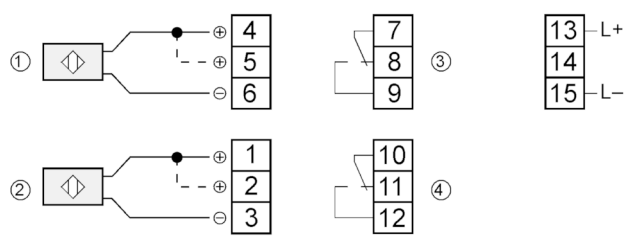

- 1: sensor 1
 - 2: sensor 2
 - 3: Relais 1
 - 4: Relais 2
- link 4-5 / 1-2 = without wire-break monitoring