




## Switching amplifiers for Namur sensors

NV0203 20-30VDC, OK 200Hz

Article no longer available - archive entry

Alternative articles: N0532A

When selecting an alternative article and accessories please note that technical data may differ!

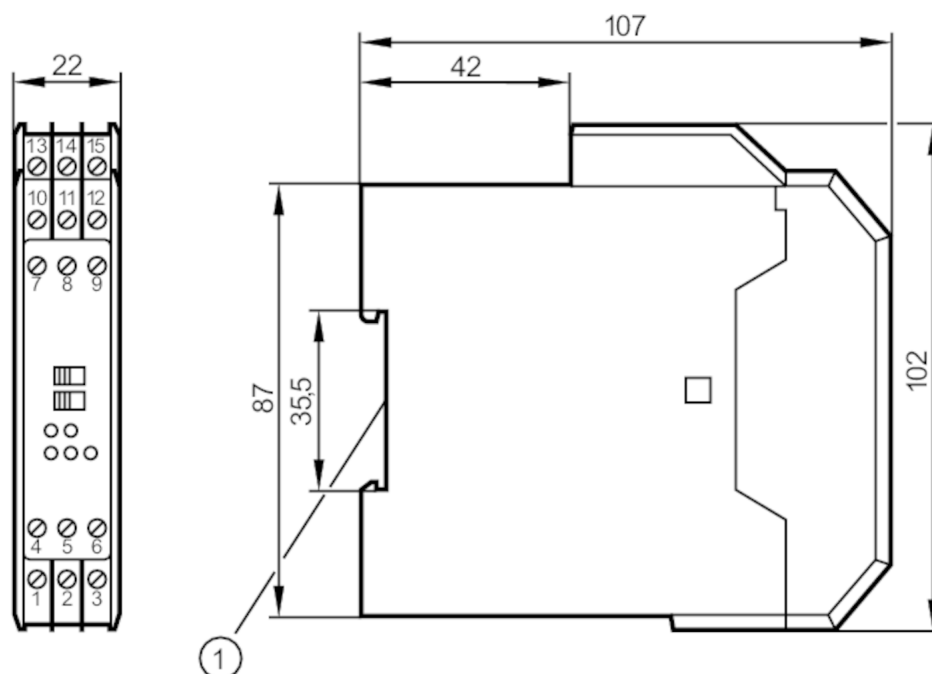

1 mounting on DIN rail



### Application

Application short-circuit monitoring; Wire monitoring

### Electrical data

Operating voltage tolerance [%]	-15...20
Operating voltage [V]	20...30 DC
Number of channels	2

### Outputs

Electrical design	opto coupler
Switching frequency DC [Hz]	200

### Operating conditions

Ambient temperature [°C]	-20...60
Protection	IP 30
Protection rating terminals	IP 20

### Tests / approvals

Approval	PTB Ex-95.C.2143X
----------	-------------------

### Safety classification

Designation	in protection rating intrinsic safety
-------------	---------------------------------------



## Switching amplifiers for Namur sensors

NV0203 20-30VDC, OK 200Hz

Voltage	[V]	< 11
Current	[mA]	< 26
Power	[mW]	< 72
[Ex ia] IIC designation		[EEx ia] IIC
[Ex ia] IIB designation		[EEx ia] IIB
[Ex ib] IIC designation		[EEx ib] IIC
[Ex ib] IIB designation		[EEx ib] IIB
[Ex ia] IIC inductance		1mH / 2mH / 5mH
[Ex ia] IIB inductance		1mH / 2mH / 5mH
[Ex ib] IIC inductance		46mH
[Ex ib] IIB inductance		170mH
[Ex ia] IIC capacitance		567nF / 581nF / 483nF
[Ex ia] IIB capacitance		2.5µF / 2.2µF / 1.8µF
[Ex ib] IIC capacitance		2.5µF
[Ex ib] IIB capacitance		15µF

### Mechanical data

Housing		housing for DIN rail mounting
Dimensions	[mm]	102 x 22 x 107

### Displays / operating elements

Display	switching status	2 x LED, yellow
	operation	LED, green
	function	2 x LED, red


### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

terminals: 15 x ...2.5 mm<sup>2</sup>

### Connection

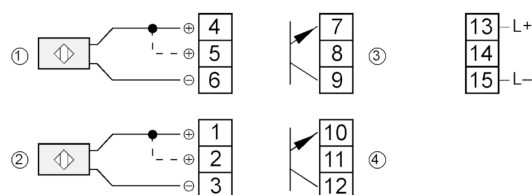

- 1: sensor 1
  - 2: sensor 2
  - 3: Output 1
  - 4: Output 2
- link 4-5 / 1-2 = without wire-break monitoring