




Pressure sensor with display

PN-025-RBR14-QFRKG/US/ IV

Article no longer available - archive entry

Alternative articles: PN7093

When selecting an alternative article and accessories please note that technical data may differ!

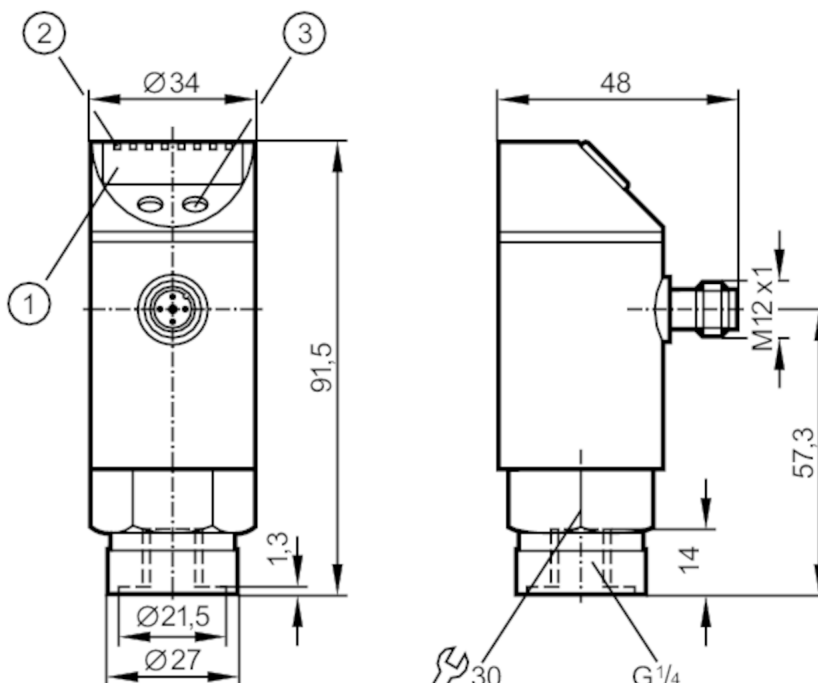

- 1 alphanumeric display 4-digit
- 2 LEDs Display unit / switching status
- 3 programming button



Product characteristics

Number of inputs and outputs	Number of digital outputs: 2		
Measuring range	0...25 bar	0...363 psi	0...2.5 MPa
Process connection	threaded connection G 1/4 internal thread		

Application

Special feature	Gold-plated contacts		
Media	liquids and gases		
Medium temperature [°C]	-25...80		
Min. bursting pressure	350 bar	5075 psi	35 MPa
Pressure rating	150 bar	2175 psi	15 MPa
Type of pressure	relative pressure		

Electrical data

Operating voltage [V]	18...36 DC; (to SELV/PELV)		
Current consumption [mA]	< 50		
Min. insulation resistance [MΩ]	100; (500 V DC)		
Protection class	III		
Reverse polarity protection	yes		



Pressure sensor with display

PN-025-RBR14-QFRKG/US/ /V

Overvoltage protection	yes; (< 40 V)
Power-on delay time [s]	0.3
Integrated watchdog	yes

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2
------------------------------	------------------------------

Outputs

Total number of outputs	2
Output signal	switching signal
Electrical design	PNP/NPN
Number of digital outputs	2
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	< 170
Short-circuit protection	yes
Type of short-circuit protection	pulsed

Measuring/setting range

Measuring range	0...25 bar	0...363 psi	0...2.5 MPa
Set point SP	0.2...25 bar	4...362 psi	0.02...2.5 MPa
Reset point rP	0.1...24.9 bar	2...360 psi	0.01...2.49 MPa
In steps of	0.1 bar	2 psi	0.01 MPa

Accuracy / deviations

Switch point accuracy [% of the final value]	< ± 0,5
Repeatability [% of the final value]	< ± 0,1; (with temperature fluctuations < 10 K)
Characteristics deviation [% of the final value]	< ± 0,5
Hysteresis deviation [% of the final value]	< ± 0,25
Long-term stability [% of the final value]	< ± 0,05
Temperature drift per 10 K	< ± 0.25

Response times

Delay time programmable dS, dr [s]	0; 0,2...50
------------------------------------	-------------

Software / programming

Parameter setting options	hysteresis / window; normally open / normally closed; diagnostic function; switching logic; switch-on/switch-off delay; Damping; Display unit
---------------------------	---

Operating conditions

Ambient temperature [°C]	-20...80
Storage temperature [°C]	-40...100
Protection	IP 67

PY9933



Pressure sensor with display

PN-025-RBR14-QFRKG/US/ /V

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5/1 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
Pressure Equipment Directive	Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight	[g]	260
Materials	stainless steel (1.4301 / 304); stainless steel (316L/1.4404); PC; PBT; PEI; FPM	
Materials (wetted parts)	stainless steel (1.4305 / 303); ceramics; FPM	
Min. pressure cycles	100 million	
Process connection	threaded connection G 1/4 internal thread	
Restrictor element integrated	no (can be retrofitted)	
Displays / operating elements		
Display	Display unit	3 x LED, green
	switching status	2 x LED, yellow
	function display	alphanumeric display, 4-digit
	measured values	alphanumeric display, 4-digit
Remarks		
Remarks	The unit is a special version of the PN70xx series.	
	For the special version the pressure compensation channel is closed. This increases the protection rating.	
Pack quantity	1 pcs.	

PY9933





Pressure sensor with display

PN-025-RBR14-QFRKG/US/ /V

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated

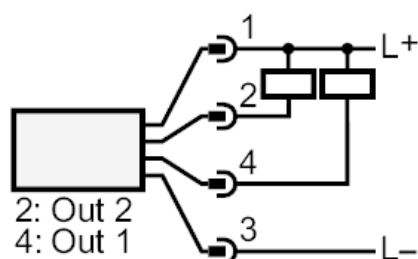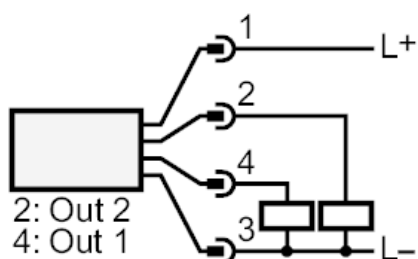

OUT1
OUT2

switching output
switching output
Diagnostic output