

# AC2463




## AS-Interface CompactLine module

CompactLine 8DI M12

Article no longer available - archive entry

Alternative article: AC5210 When selecting an alternative article and accessories please note that technical data may differ! – When selecting an alternative article and accessories please note that technical data may differ!

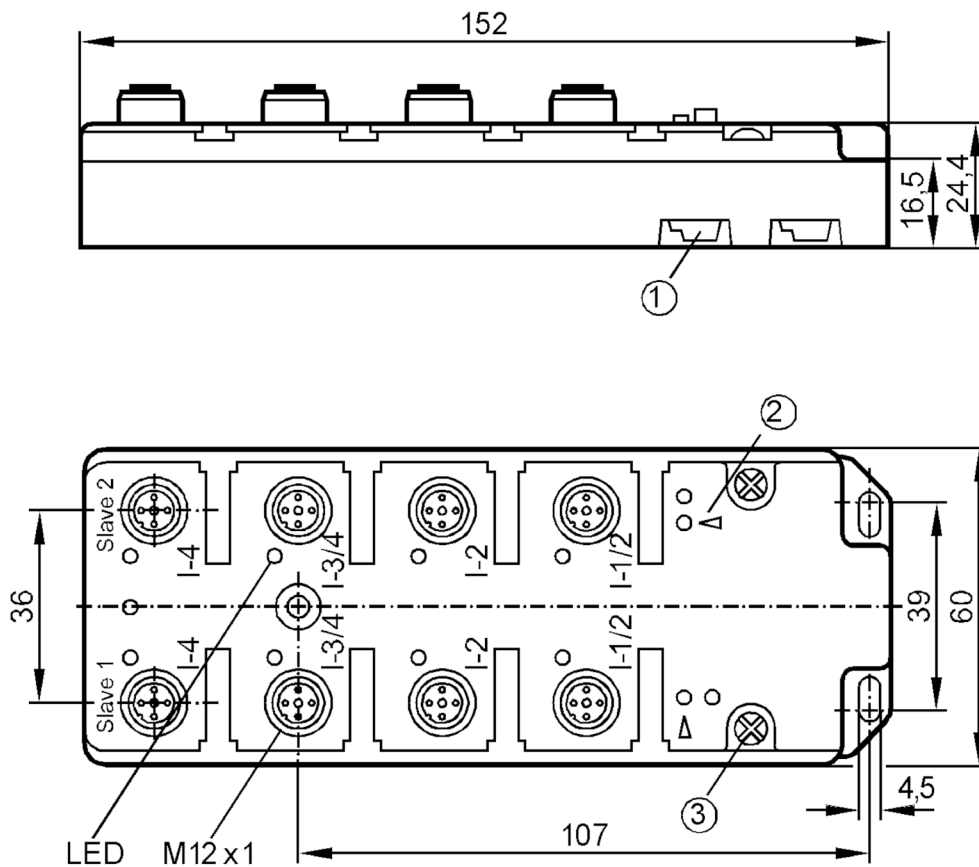

- 1 AS-i supply
- 2 fixture infrared adapter
- 3 earth spring



### Electrical data

Operating voltage	[V]	26.5...31.6 DC; (operating voltage "supply class 2" according to cULus)
Max. current consumption from AS-i	[mA]	250

### Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 8
------------------------------	-----------------------------



## AS-Interface CompactLine module


CompactLine 8DI M12

Inputs																					
Number of digital inputs	8; (2 x Slave)																				
Input circuit of digital inputs	PNP																				
Sensor supply of the inputs	AS-i																				
Voltage supply [V]	20...30; (operating voltage "supply class 2" according to cULus)																				
Max. total current rating of inputs [mA]	200; (for each Slave)																				
Input current High [mA]	6...10																				
Input current Low [mA]	0...2																				
Min. switching level high signal [V]	11																				
Digital inputs protected against short circuits	yes																				
Outputs																					
Electrical design	AS-i																				
Operating conditions																					
Ambient temperature [°C]	-25...80																				
Protection	IP 67																				
Tests / approvals																					
EMC	EN 50295																				
AS-i classification																					
AS-i version	2.1																				
AS-i addressing	IR addressing possible																				
Extended addressing mode possible	no																				
AS-i profile	S-0.1.E																				
AS-i I/O configuration [hex]	0																				
AS-i ID code [hex]	1.E																				
AS-i certificate pending	yes																				
Assignment of the data bits	<table border="1"> <thead> <tr> <th>data bit</th> <th>D0</th> <th>D1</th> <th>D2</th> <th>D3</th> </tr> </thead> <tbody> <tr> <td>input</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>socket</td> <td>I-1/2</td> <td>I-1/2 I-2</td> <td>I-3/4</td> <td>I-3/4 I-4</td> </tr> <tr> <td>pin</td> <td>4</td> <td>2 4</td> <td>4</td> <td>2 4</td> </tr> </tbody> </table>	data bit	D0	D1	D2	D3	input	1	2	3	4	socket	I-1/2	I-1/2 I-2	I-3/4	I-3/4 I-4	pin	4	2 4	4	2 4
	data bit	D0	D1	D2	D3																
	input	1	2	3	4																
	socket	I-1/2	I-1/2 I-2	I-3/4	I-3/4 I-4																
pin	4	2 4	4	2 4																	
Mechanical data																					
Type of mounting	AS-i flat cables directly connectable																				
Dimensions [mm]	60 x 152 x 24.4																				
Materials	PUR																				
Displays / operating elements																					
Display	operation	LED, green																			
	errors	LED, red																			
	function	LED, yellow																			
Remarks																					
Remarks	Do not connect any of the following points to an external potential: I-, I+, I1, I2, I3, I4																				
Pack quantity	The connections are electrically connected with the AS-i cable. 1 pcs.																				



### Electrical connection

#### Connection

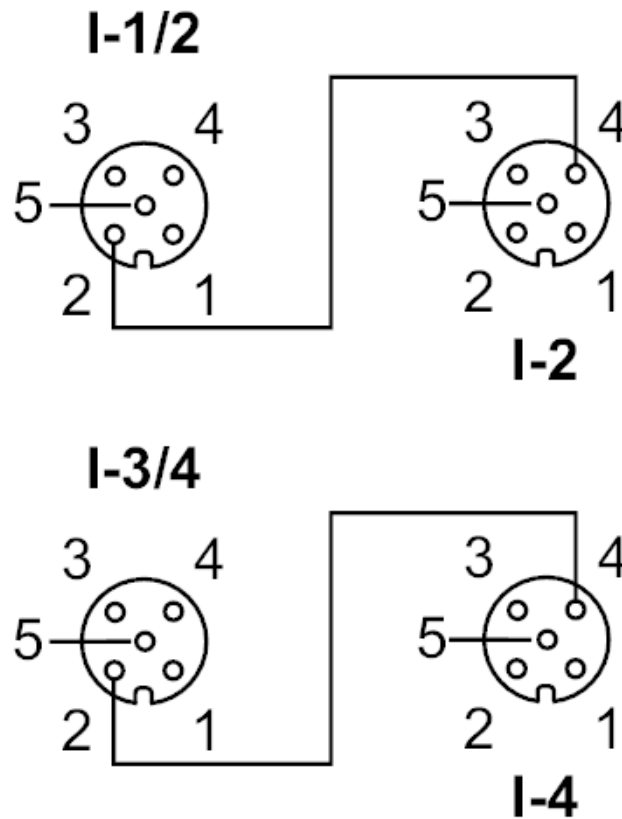

Connector: M12

Article no longer available - archive entry

Alternative article: AC5210 When selecting an alternative article and accessories please note that technical data may differ! – When selecting an alternative article and accessories please note that technical data may differ!