
Continuous level sensor (guided wave radar)





For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.



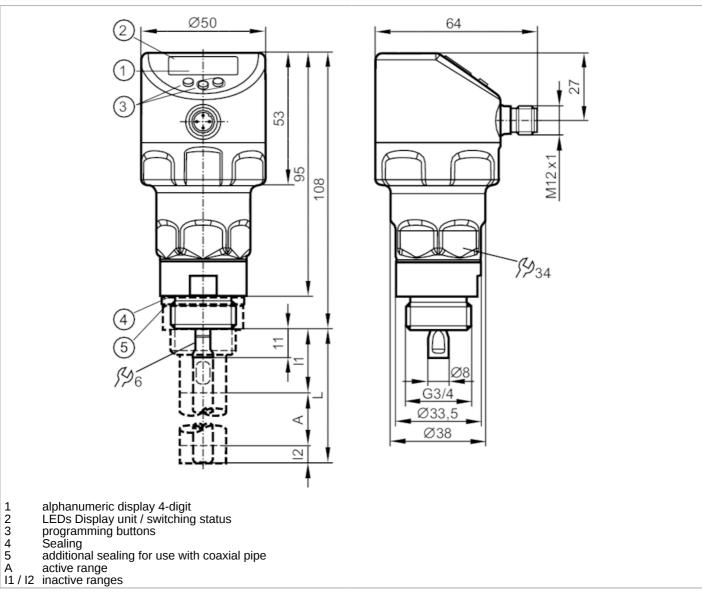

Product characteristics						
Number of inputs and outputs		Number of digital outputs: 1; Number of analogue outputs: 1				
Probe length L	[mm]	1502000				
Process connection		threaded connection G 3/4 external thread				
Application						
Special feature		Gold-plated contacts				
Application		for industrial applications				
Media		Liquids				
Dielectric constant of the medium		≥ 1,8; (for media with a dielectric constant of 1.85 (e.g. oils), a coaxial pipe is needed for operation)				
Recommended media		water; hydrous media; oils; oil-based media				

Continuous level sensor (guided wave radar)



LR0000B-ER34AKSKG/US

Process temperature	[°C]	-20100; (see note under remarks)	
Pressure rating	[bar]	16	
Vacuum resistance	[mbar]	-1000	
MAWP (for applications	[bar]	16	
according to CRN)			
Electrical data			
Operating voltage	[V]	1830 DC	
Current consumption	[mA]	< 50	
Protection class		III	
Reverse polarity protection		yes	
Power-on delay time	[s]	< 3	
Measuring principle		guided wave radar	
Inputs / outputs			
Number of inputs and output	S	Number of digital outputs: 1; Number of analogue outputs: 1	
Outputs			
Total number of outputs		2	
Output signal		switching signal; analogue signal; IO-Link	
Electrical design		PNP/NPN	
Number of digital outputs		1	
Output function		normally open / normally closed; (parameterisable)	
Max. voltage drop switching output DC	[V]	2.5	
Permanent current rating of switching output DC	[mA]	150; (200 (60 °C))	
Number of analogue outputs		1	
Analogue current output	[mA]	420, invertible; (scalable)	
Max. load	[Ω]	500	
Short-circuit protection		yes	
Type of short-circuit protection		pulsed	
Overload protection		yes	
Measuring/setting range			
Probe length L	[mm]	1502000	
Active range A	[mm]	L-40 (L-60); (when set to oil and oil based media)	
Inactive range I1 / I2	[mm]	30 / 10 (30); (when set to oil and oil based media)	
Sampling rate	[Hz]	4	
Setting range			
Set point SP	[mm]	15L-30	
Note on setpoint SP		when set to oil and oil based media: 35L-30	
Reset point rP	[mm]	10 L-35	
Note on reset point rP		when set to oil and oil based media: 30L-35	
In steps of	[mm]	1	
Hysteresis	[mm]	> 5	
Accuracy / deviations			
Measuring error	[mm]	± 7	

Continuous level sensor (guided wave radar)



LR0000B-ER34AKSKG/US

Offset error	[mm]		5				
Resolution	[mm]		1				
Zero signal (current)	[mA]		4.0				
Full signal (current)	[mA]		20				
Temperature drift per 10 K			± 0.2 %				
Interfaces			·				
Communication interface			IO-Link				
Transmission type			COM2 (38,4 kBaud)				
IO-Link revision			1.1				
SDCI standard			IEC 61131-9				
Profiles		Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis					
SIO mode		yes					
Required master port type		A					
Process data analogue		1					
Process data binary			2				
Min. process cycle time	[ms]						
Supported DeviceIDs		Type of operation	DeviceID				
		default	479				
Operating conditions							
Ambient temperature	[°C]		-4080				
Storage temperature	[°C]	-40100					
Protection			IP 68; IP 69K				
Tests / approvals							
EMC		DIN EN 61000-6-2					
		DIN EN 61000-6-3	: in a closed metal tank				
Observation and the same		DIN EN 61000-6-4	: in plastic or open metal tanks				
Shock resistance		DIN EN 60068-2-27	50 g (11 ms) / 20 g (6 ms) with reference rod 0.5 m				
Vibration resistance		DIN EN 60068-2-6	20 g (102000 Hz) / 1 g (5200 Hz) with reference rod 0.5 m				
MTTF	[years]	216					
Mechanical data							
Weight	[g]		367.4				
Materials		stainless steel (316L/1.4404); PEI; PFA; PBT; FKM					
Materials (wetted parts)		stainless steel (316L/1.4404); stainless steel (316L/1.4435); PTFE; FKM					
Process connection	ocess connection threaded connection G 3/4 external thread						
Displays / operating elements							
Display		Display unit	3 x LED, green				
		switching status	2 x LED, yellow				
		level	alphanumeric display, 4-digit				
		parameter setting	alphanumeric display, 4-digit				
Remarks							
Notes		For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.					
Pack quantity			1 pcs.				

Continuous level sensor (guided wave radar)

LR0000B-ER34AKSKG/US




Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

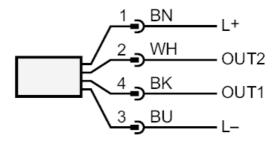

OUT1: switching output IO-Link

OUT2: switching output analogue output

colours to DIN EN 60947-5-2

Core colours :

 BK =
 black

 BN =
 brown

 BU =
 blue

 WH =
 white

Continuous level sensor (guided wave radar)



LR0000B-ER34AKSKG/US

Diagrams and graphs

Measurement deviation D at the limits of the active rod range

